

# Ara Wall Light Series

Excellent modern LED wall lights can be divided into many types, from standard to waterproof rated, for both interior and exterior applications. Genesis One Lighting has a wide range of alternatives suitable to most commercial and architectural applications. Genesis One Lighting's wall mount light fixtures are usually designed with waterproof rubber rings for IP65 or IP54 ingress protection. Safe and reliable LED wall mount light fixtures have an aluminum heat sink, powder coated spray painting surface treatment and are corrosion resistant.




Commercial wall lights best suitable for corridors, stairwells, reception areas, meeting rooms, parking lots and landscapes

The Ara, Astro and Subra LED wall light ranges, offers the end user or architect the flexibility of choice to achieve the design vision and concept with ease. These wall lights are designed to enable ease of installation, longevity and architectural design.

The IP Rating of the wall lights provides flexibility of positioning and security. The wall lights will often have the option of dimming control, day and night sensors.



## Ara 07 Wall Light

The Ara 07 hollow cone-shaped opal PC diffuser design provides exceptional heat dissipation. The up / down lighting effect has become a favorite amongst many end users and architects.

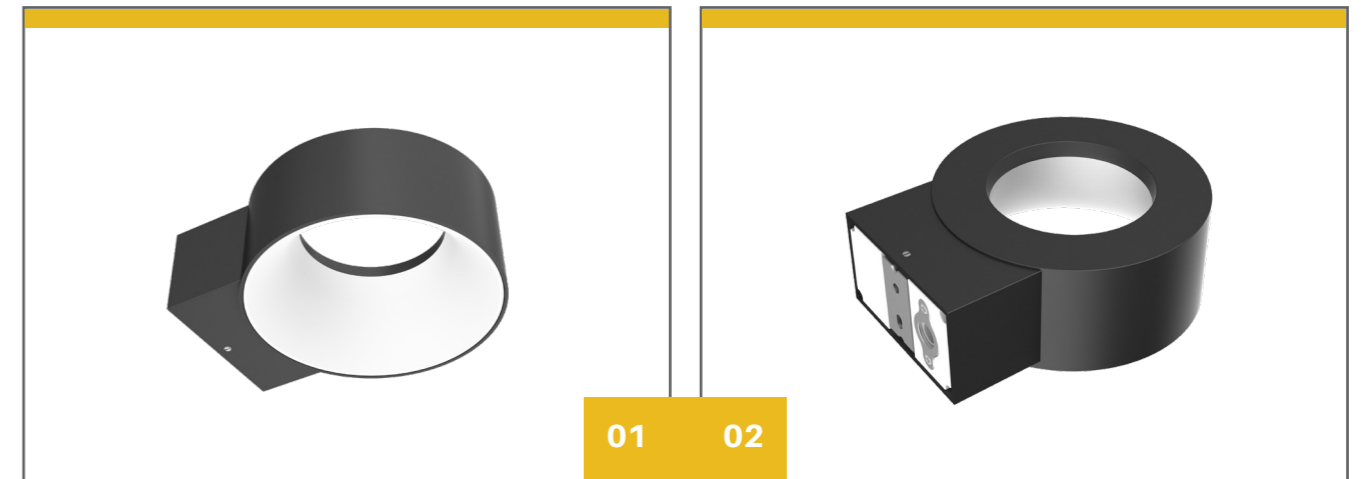


Up and down luminous design  
Indoor or outdoor application  
Aluminium housing  
94-V0 fire rated PC  
CCT: 3000K 4000K 5000K 5700K  
Life hours >50,000hrs L70  
IP65  
IK10

CODE	POWER (W)	LUMEN (LM)	DIMENSIONS (MM)	BEAM ANGLE
WL170N/08**007	8	600	170*140*59	140°

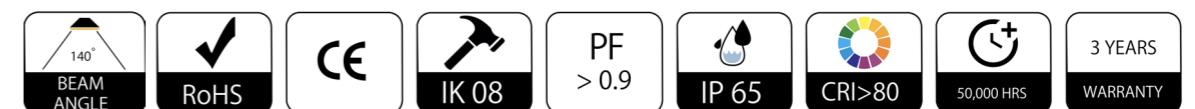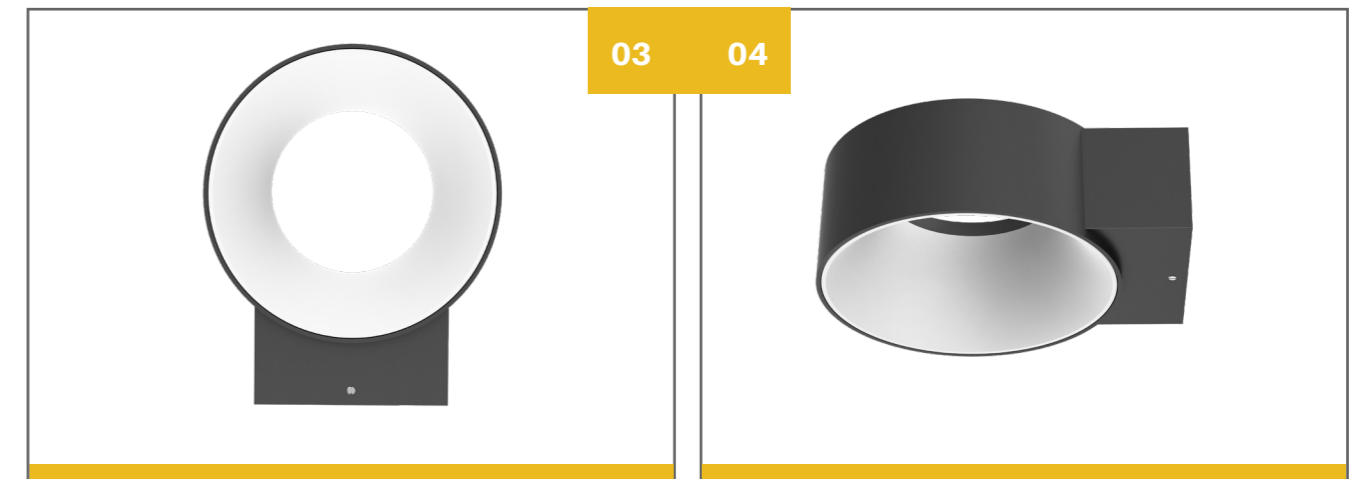


# Ara 16 Wall Light Up/Down

The Ara 16 is a creative up / down wall light with a traditional classical design to meet the public aesthetic requirements. The up and down structure creates a soft, beautiful lighting effect.

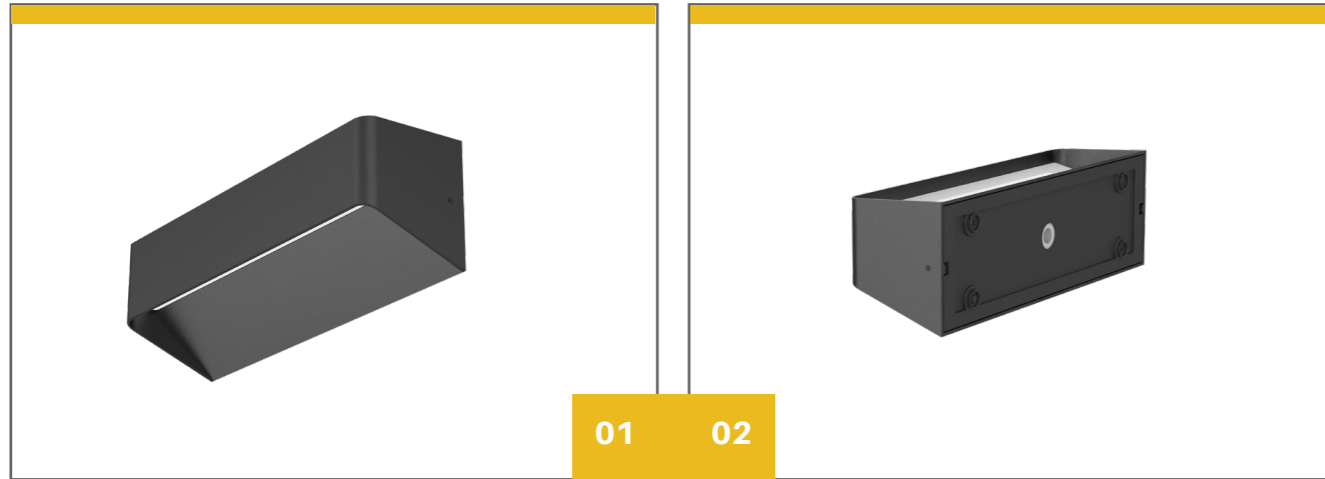


ADC12 housing for thermal management  
 94-V0 fire rated PC diffuser  
 CCT: 3000K 4000K 5000K 5700K  
 IP54  
 IK08  
 Material: Aluminium  
 Life hours >50,000hrs L70

CODE	POWER (W)	LUMEN (LM)	DIMENSIONS (MM)	BEAM ANGLE
WL150N/10**016	10	900	150 *100* 92	90°
WL300N/18**016	18	1,700	300*100*92	90°

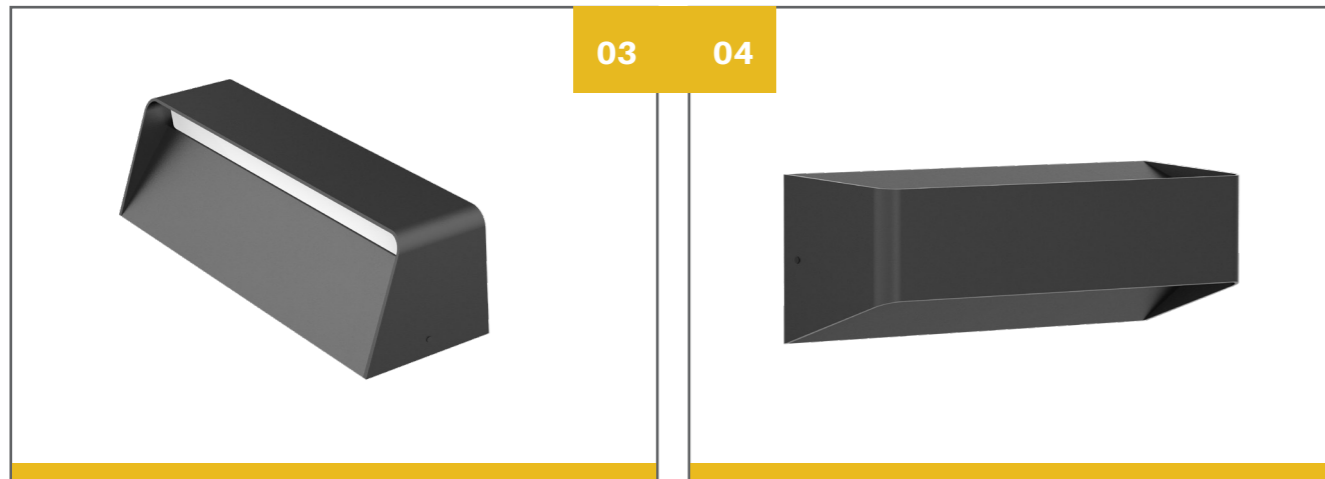


# Ara 20 Wall Light Adjustable

The Ara 20 is a rectangular black up / down wall light with ADC12 aluminium housing which provides excellent thermal management. The beam angle can be adjusted by the flexible plate creating a unique up and down functional design.

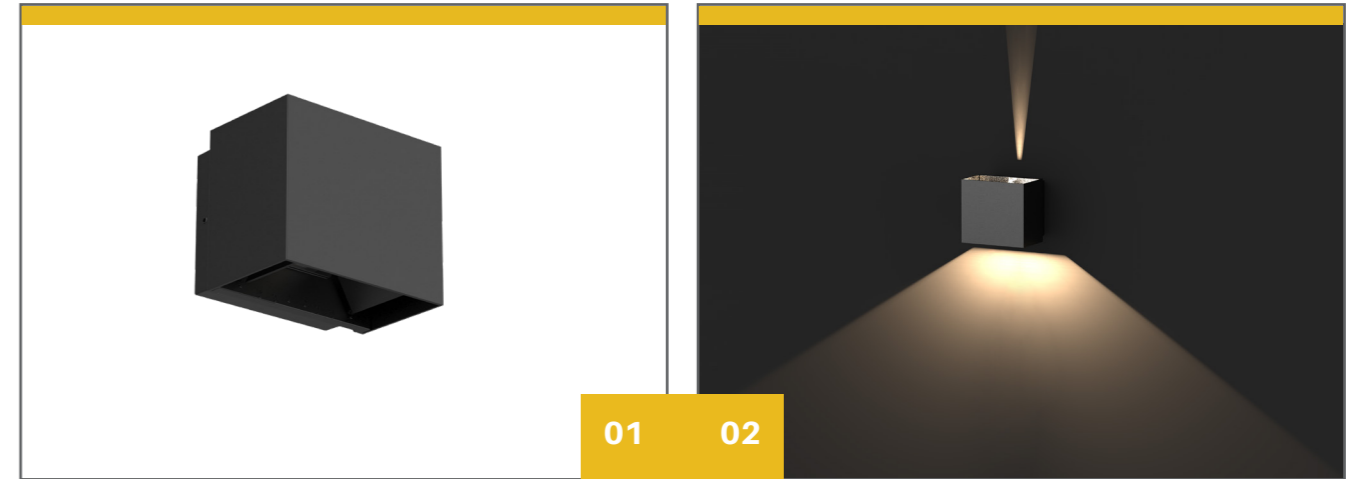

ADC12 housing for thermal management  
 IP65 IK06 high protection level  
 Beam angle: Adjustable 15° ~ 120°  
 CCT: 3000K 4000K 5000K 5700K  
 Finished colour: Black  
 Life hours >50,000hrs L70

CODE	POWER (W)	LUMEN (LM)	DIMENSIONS (MM)	BEAM ANGLE
WL120N/10**020	10	750 ~ 900 (*2)	120 *98*100	Adjustable 15°~120°
WL240N/18**020	18	1,150 ~ 1,350 (*2)	242 *98*100	Adjustable 15°~120°

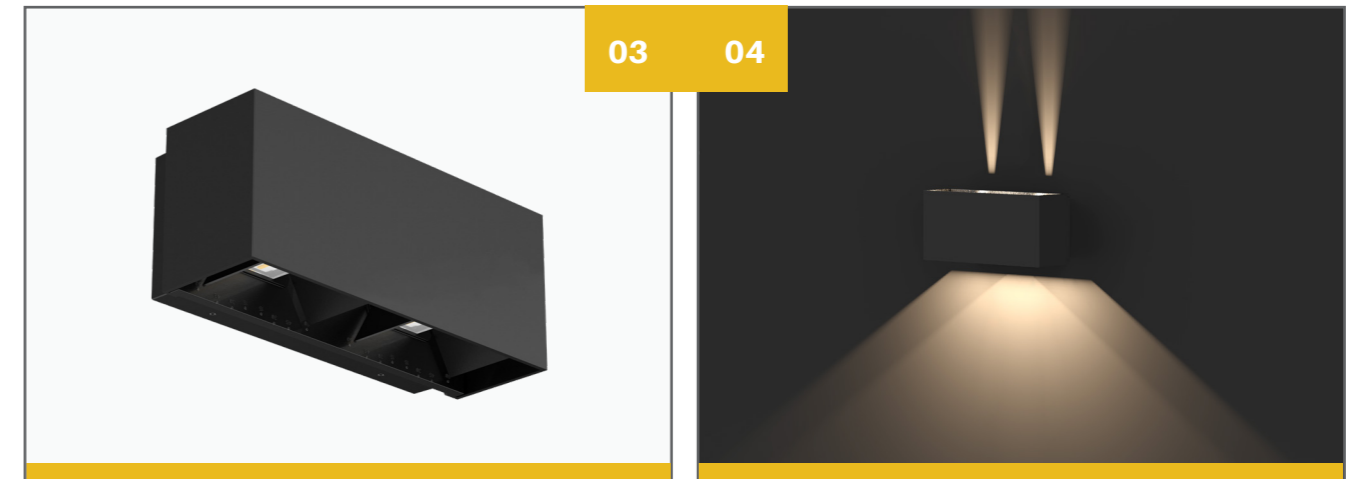

# Ara 28 Wall Light Up/Down

The Ara 28 wall light is a traditional classical design to meet the public aesthetic requirements. The up and down structure creates a soft, beautiful lighting effect.



ADC12 housing for thermal management  
94-V0 fire rated PC diffuser  
CCT: 3000K 4000K 5000K 5700K  
IP65  
IK08  
Material: Aluminium  
Life hours >50,000hrs L70

CODE	POWER (W)	LUMEN (LM)	DIMENSIONS (MM)	BEAM ANGLE
WL170N/10**028	10	750	170*60*105	15°/24°/60°
WL200N/20**028	20	2,000	200*76*121	15°/36°/60°
WL230N/27**028	27	2,950	230*76*145	15°/24°/60°




# Ara 46 Wall Light

The Ara 46 wall light won the 2020 IF Award. The Ara 46 has a special optical structure to deliver a layering of indirect and soft light. It can be installed individually as a wall light to create a warm welcoming atmosphere or in groups, to create various shapes.




ADC12 housing for thermal management  
94-V0 fire rated PC diffuser  
CCT: 3000K 4000K 5000K 5700K  
IP65  
IK08  
Material: Aluminium  
Life hours >50,000hrs L70

CODE	POWER (W)	LUMEN (LM)	DIMENSIONS (MM)	BEAM ANGLE
WL204N/10**046	10	490	204*81*78	50°




# Ara 52 Wall Light

This wall light has two lampshade options (PC shade and metal grille shade) with flexible assembly. The lamp shade can be installed up & down / front & back providing flexibility in architectural design.

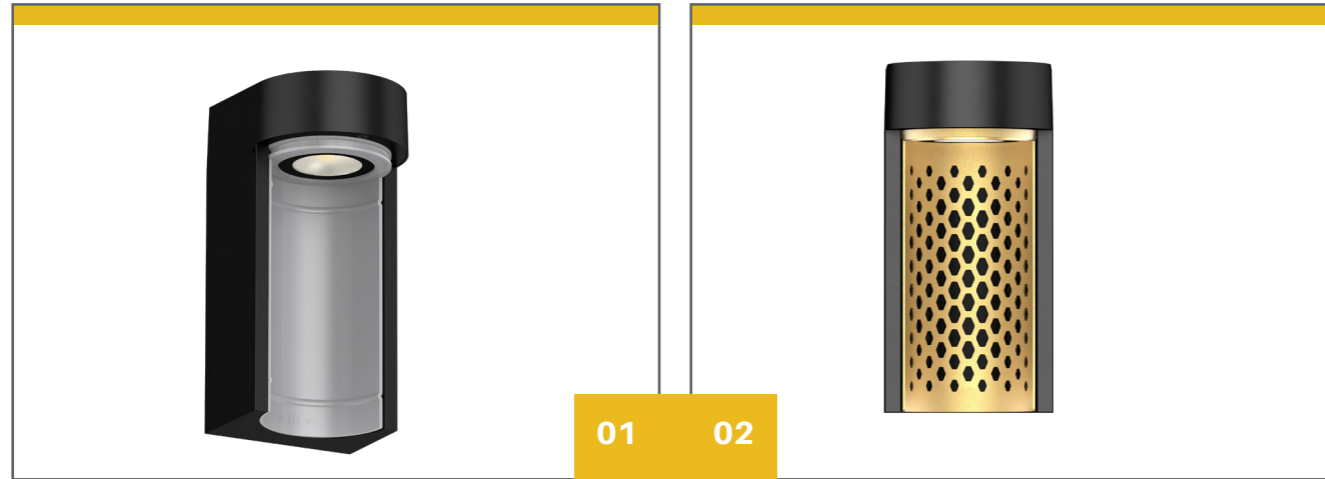


Two lampshade options: PC shade and metal grille shade  
Flexible lampshade assembly  
Interchangeable CCT (2700K+4000K+6500K) with slide switch  
Fixture colour: Black  
Grill shade colour: Brass 7555 U  
Internal flicker free driver  
Life hours >50,000hrs L70

CODE	POWER (W)	LUMEN (LM)	DIMENSIONS (MM)	BEAM ANGLE
WL229N/10**052	10	550	229 * 113 * 120	30°

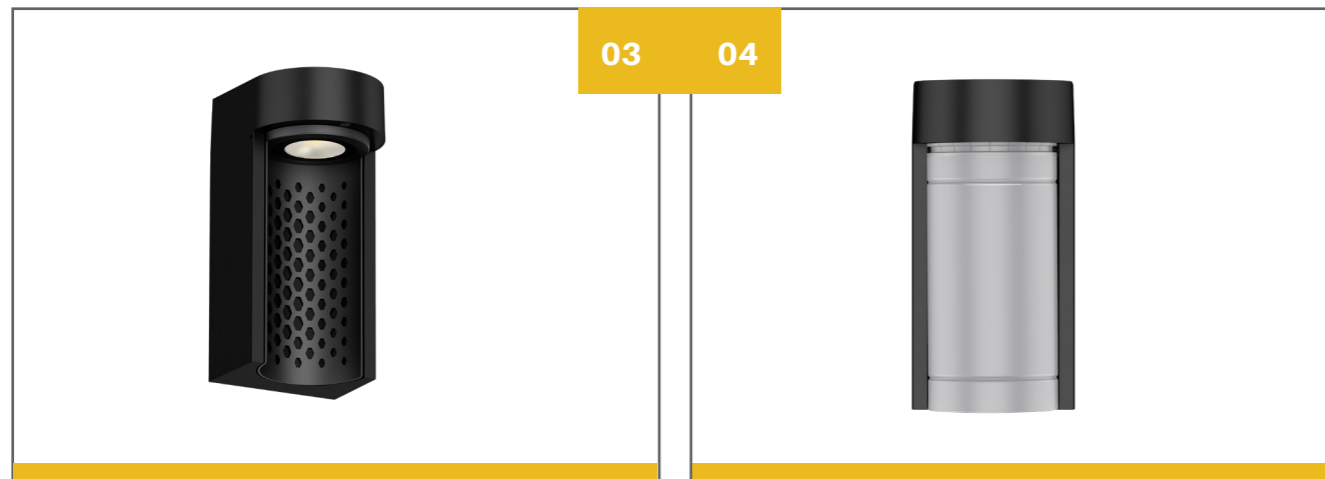



# Ara 57 Wall Light

The Ara 57 wall light uses high lumen 2835 SMD light source with a high Colour Rendering Index. ADC12 aluminium housing provides excellent thermal management. It has a multi-louver reflector design with clear tempered glass as well as a frosted tempered glass option.

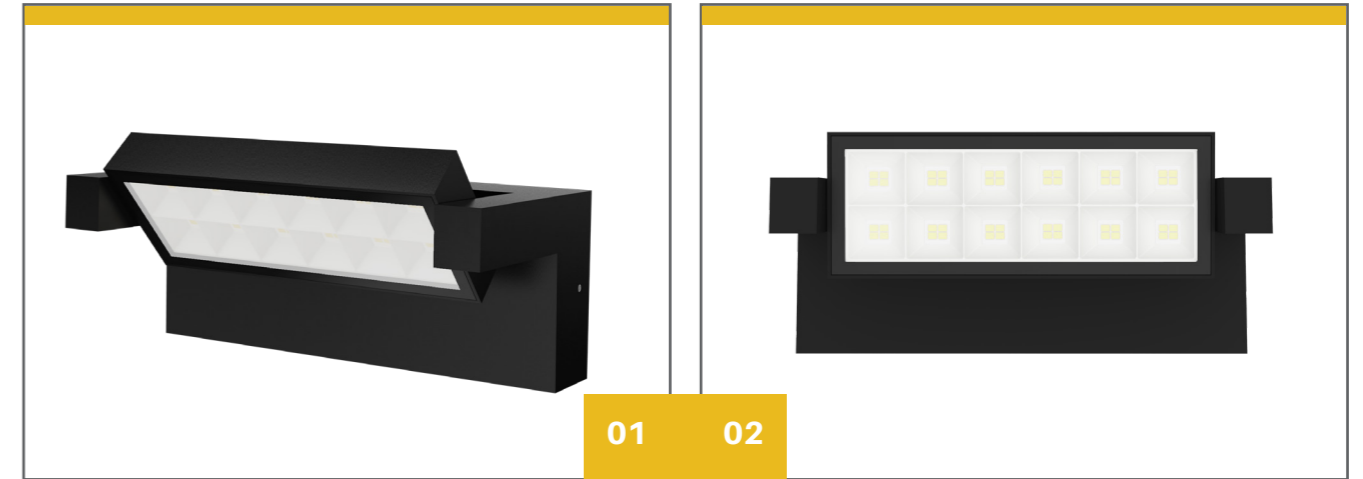


Adjustable head 240° (30° clockwise, 210° counterclockwise)  
High lumen efficiency, 100-110lm/W  
IP65 IK06 high protection level  
Beam angle 90°  
Finished colour: Black  
Life hours >50,000hrs L70  
Type A: frosted tempered glass  
Type B: clear tempered glass

CODE	POWER (W)	LUMEN (LM)	DIMENSIONS (MM)	BEAM ANGLE
WL200N/10**057A	10	1,200	203*108*80	90°
WL200N/10**057B	10	1,200	203*108*80	90°
WL200N/18**057A	18	1,200	203*108*80	90°
WL200N/18**057B	18	1,200	203*108*80	90°

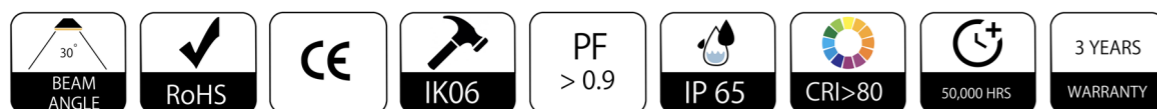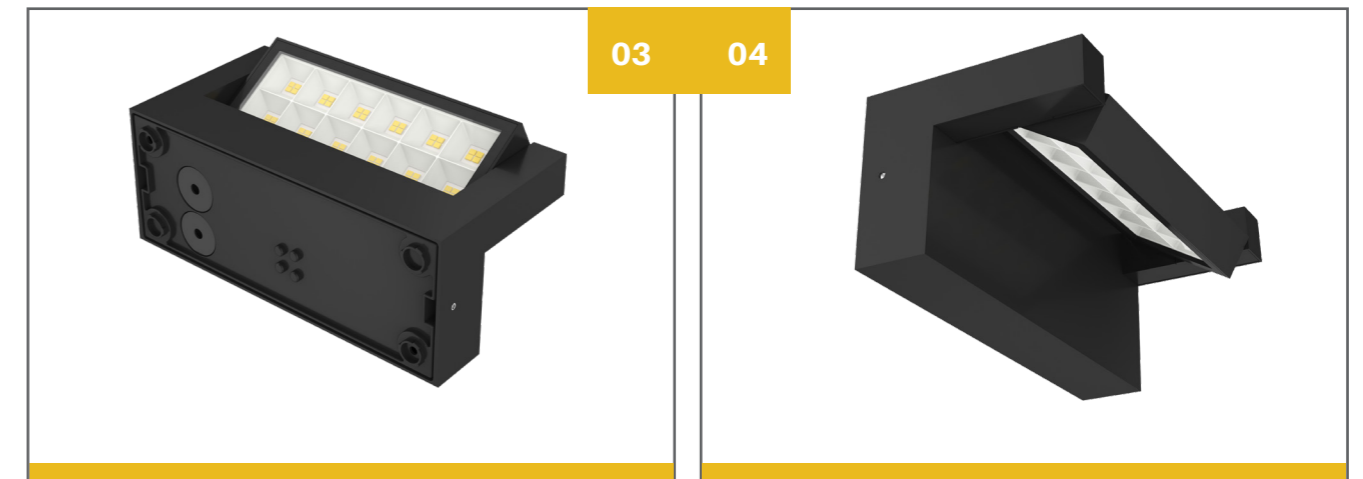


# Ara 59 Step Light (Surface)

The LED step light 59 is a compact wall light with surface mount installation and round / square / rectangular shape options. Combined with linear design and indirect lighting the step light achieves a low glare effect. IP65 ingress protection for both indoor and outdoor application.

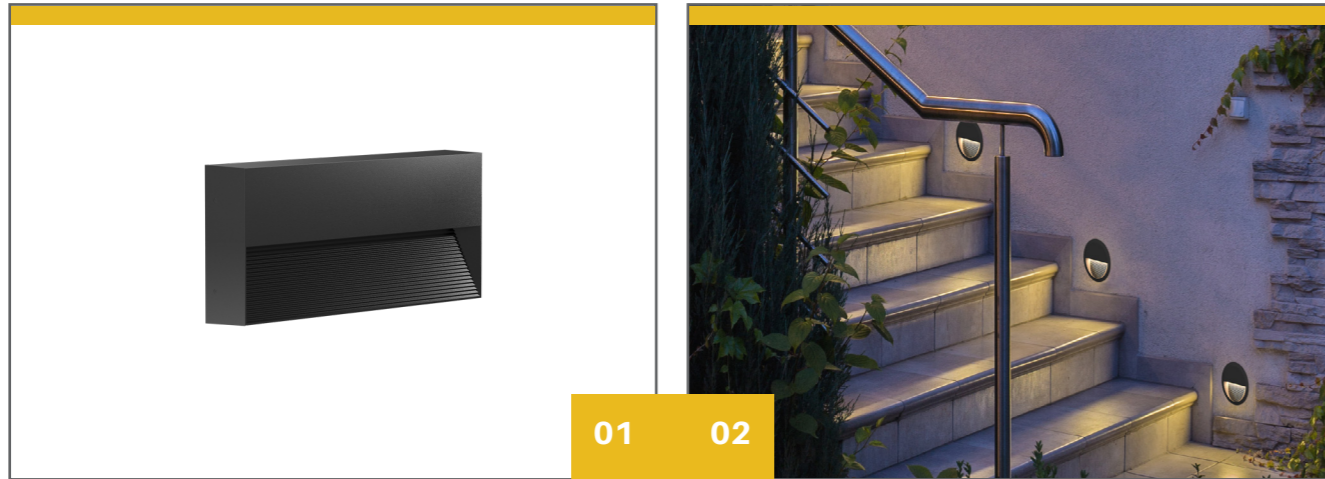


Round / square / rectangular shape options  
 Indirect lighting with hidden LED chip, low UGR  
 Aluminium housing provides a great thermal management  
 P65 IK08 protection for both indoor and outdoor application  
 Loop in / out wire design  
 CCT: 3000K 4000K 5000K 5700K  
 Life hours >50,000hrs L70

CODE	POWER (W)	LUMEN (LM)	DIMENSIONS (MM)	BEAM ANGLE
SL115N/05**59A	5	150 ~ 220	Ø114*40	60°
SL180N/08**59A	8	350 ~ 500	Ø180*37	70°
SL115N/05**59B	5	150 ~ 220	114*114*40	60°

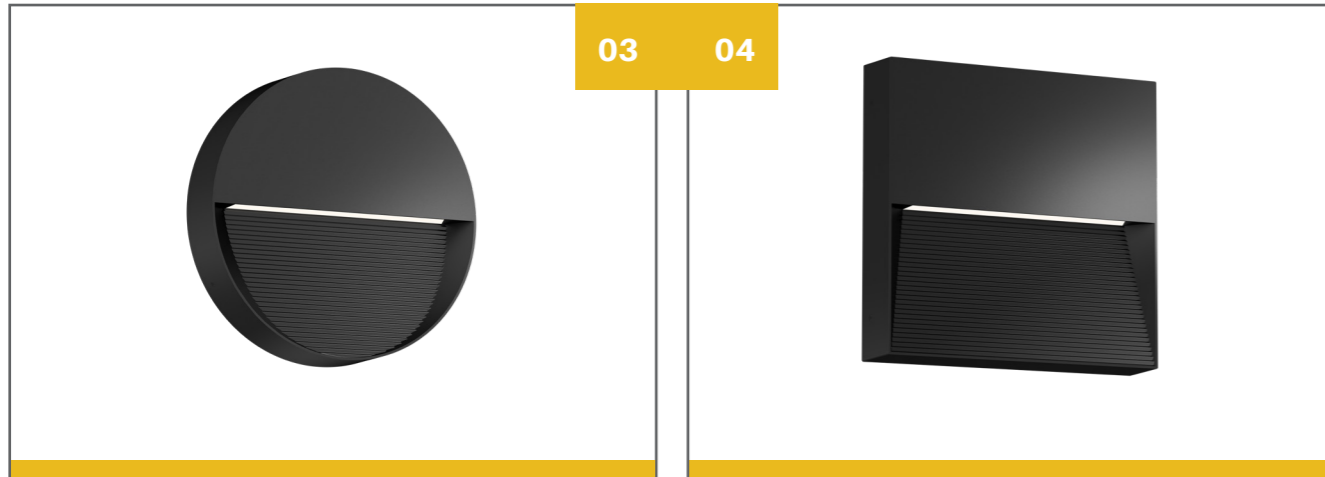


SL180N/08**59B	8	350 ~ 500	180*180*40	70°
SL115N/05**59C	5	150 ~ 220	114*180*35	70°
SL250N/10**59C	10	350 ~ 500	250*114*35	70°

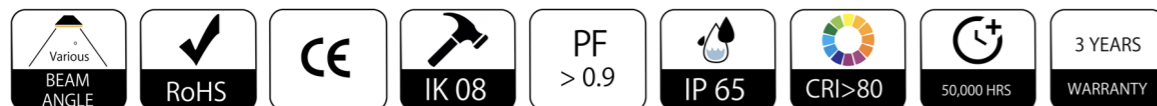


# Ara 60 Step Light (Recessed)

The LED step light 60 is a compact wall light with recessed mount installation and round/square/rectangular shape options. Combined with a linear design and indirect lighting the step light achieves a low glare effect. IP65 ingress protection for both indoor and outdoor application.

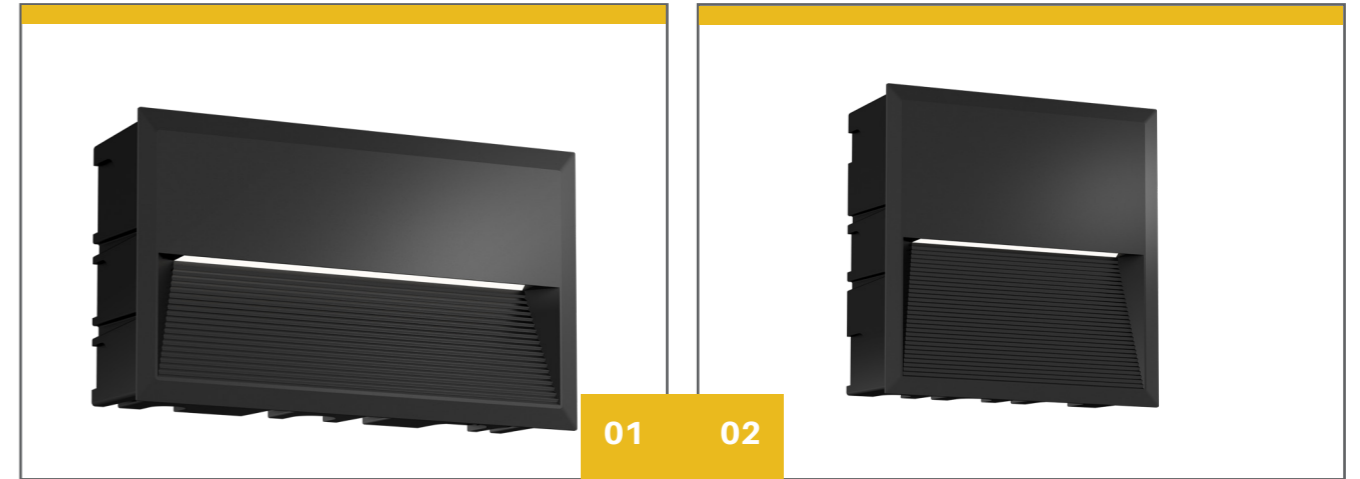


Round / square / rectangular shape options  
 Indirect lighting with hidden LED chip, low UGR  
 Aluminium housing provides a great thermal management  
 P65 IK08 protection for both indoor and outdoor application  
 Loop in / out wire design  
 CCT: 3000K 4000K 5000K 5700K  
 Life hours >50,000hrs L70

CODE	POWER (W)	LUMEN (LM)	CUTOUT (MM)	BEAM ANGLE
SL135N/05**60A	5	150 ~ 220	Ø130 * 78	60°
SL200N/08**60A	8	350 ~ 500	Ø196 * 78	70°
SL136N/05**60B	5	150 ~ 220	130*130*78	60°

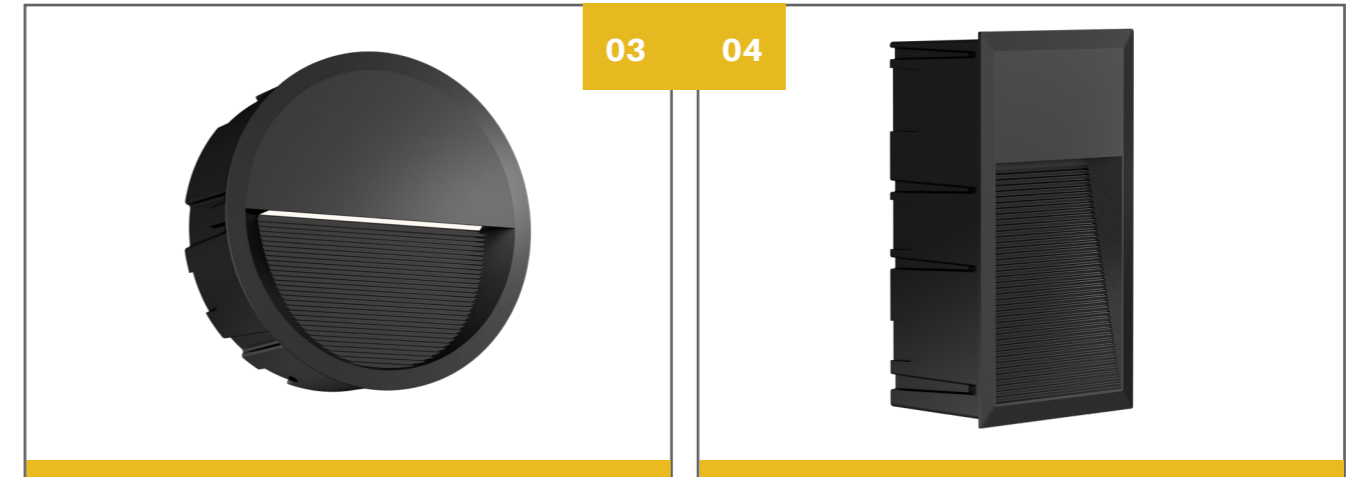


SL200N/08**60B	8	350 ~ 500	195*195*78	70°
SL136N/05**60C	5	150 ~ 220	130*196*78	70°
SL270N/10**60C	10	350 ~ 500	266*130*78	70°




# Ara 68 Wall Light

The Ara Wall Light 68 is a bedside lamp with phone shelf. There are two lighting sources, CREE COB light source for the front part and a SMD2835 light source for back part. It has touch switch and rocker switch versions. Both versions have two switches for front and back lighting.

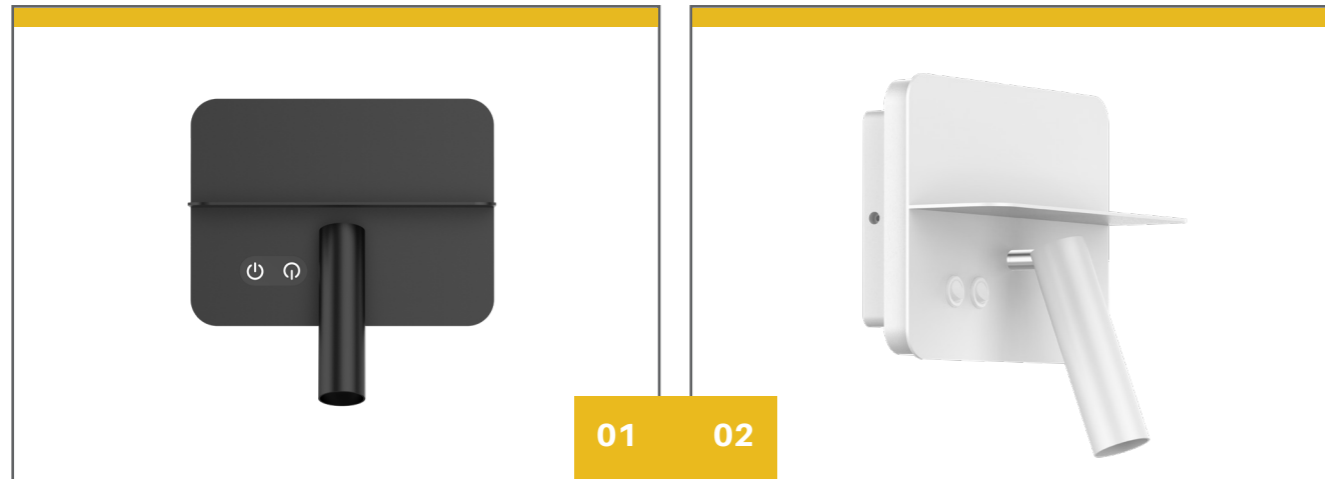

Wall mounted LED bedroom reading light with spotlight and backlight bring high quality environment light  
Soft indirect back light can be regarded as night light when the spotlight is turned off  
Anti- glare spotlight  
Basic switch on/off version and functional touch dimming & USB chargers version are optional  
A mini metal shelf added on the front to support an charging phone  
Flicker free driver  
Aluminium metal front plate & spotlight head with PC back frame

CODE	POWER (W)	LUMEN (LM)	DIMENSIONS (MM)	BEAM ANGLE
WL200N/05**068	4.5	375	200*202*95	30°
WL200N/05**068T	4.5 focus light +4.5 Ambient	375	200*202*95	30°

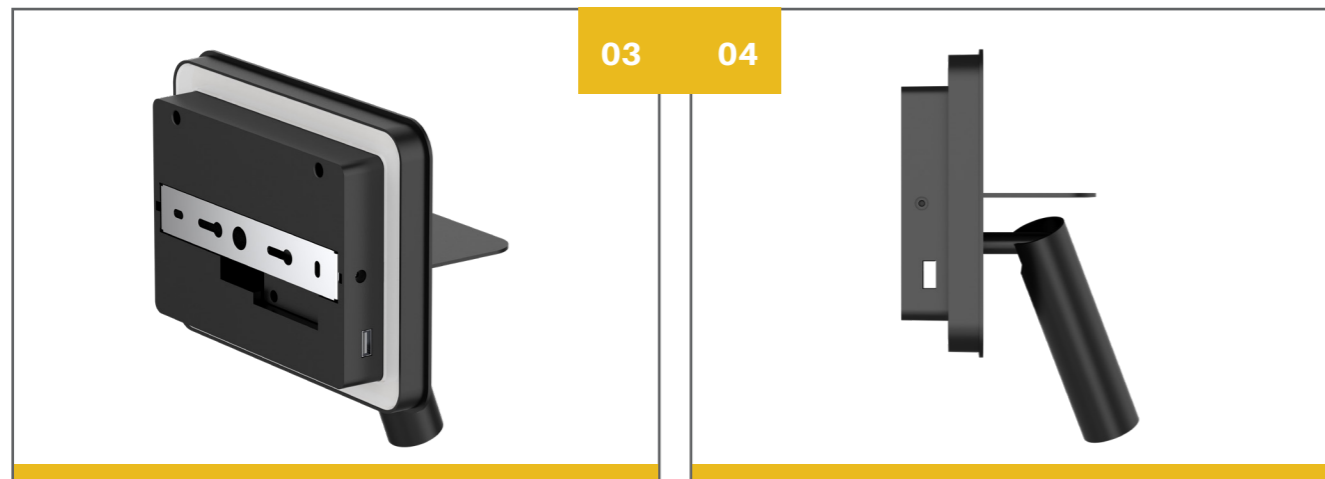



# Ara 69 Wall Light

The Ara 69 LED wall Light compact design and switch knob dimming is available with a goose neck or short neck. USB charging function with mobile phone shelf bracket.  
The Ara 69 is available in White (RAL9016) or Black (RAL9005).




Bedside lamp with compact design and switch knob dimming  
Type A with gyro structure design (Shortneck)  
Type B with an elbow pipe design (Gooseneck)  
Both versions have an external 12V 1.5A adapter with USB charging function  
Mounting  
Option 1: Lock the lamp from ends with screws into the bracket  
Option 2: Install the bracket(with mobile phone shelf ) into the wall, the lamp can be directly inserted into the bracket

CODE	POWER (W)	LUMEN (LM)	DIMENSIONS (MM)	BEAM ANGLE
WL160D/05**69A	5	350 ~ 420	161*150*81	36°
WL160D/05**69B	5	350 ~ 420	161*150*81	36°

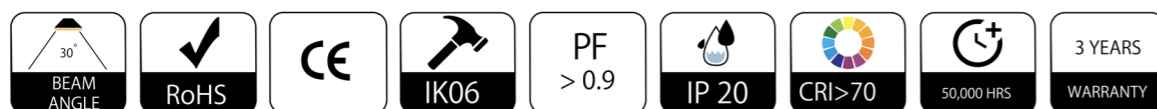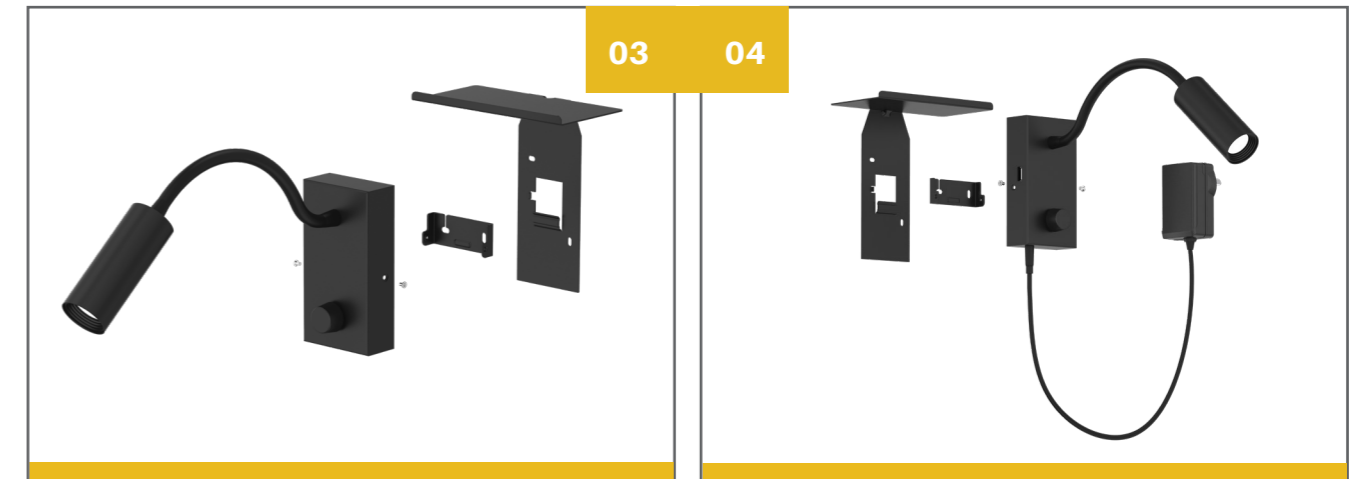

# Ara 73 Wall Light (GU10 Version optional)

The Ara 73 wall light has semi-circle and square shape options. It adopts a COB light source, PC reflector and high transmittance tempered glass creates a uniform light output. Optional GU10 modules for convenient replacement and maintenance.

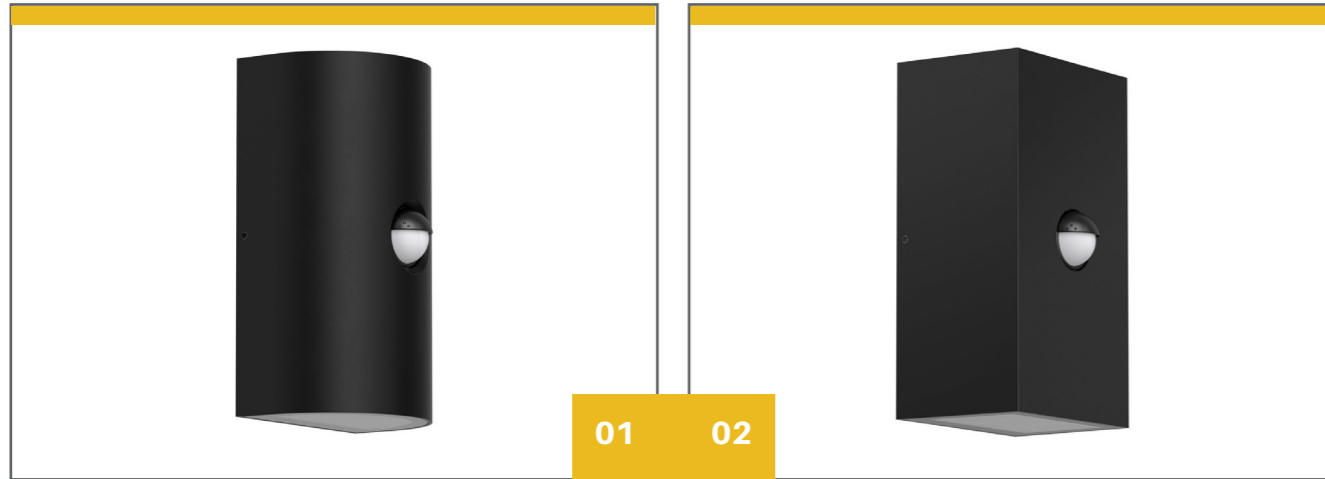


Two shapes options: Ara 73A is semi-circle, Ara 73B is square  
 IP65 Waterproof  
 Adjustable PIR sensor  
 Internal flicker free driver  
 Four decorative accessories: Wall washer angle 45° / 60° / 90° and three separated light beam 45°+20°+20°  
 Type A: Round  
 Type B: Square  
 Life hours >50,000hrs L70

CODE	POWER (W)	LUMEN (LM)	DIMENSIONS (MM)	BEAM ANGLE
WL165N/05**073A/B	5	450	165*95*67	Various
WL165N/10**073A/B	2*5	900	165*95*67	Various
WL165N/08**073A/B	8	750	165*95*67	Various
WL165N/16**073A/B	2*8	1,600	165*95*67	Various


# Ara 75 Wall Light

The Ara 75 is an ultra-thin design wall light. It uses a SMD light source, illuminating from both ends with a PC lens creating a wall-washing optical effect. The up & down lighting design creates a beautiful architectural finish to any building.

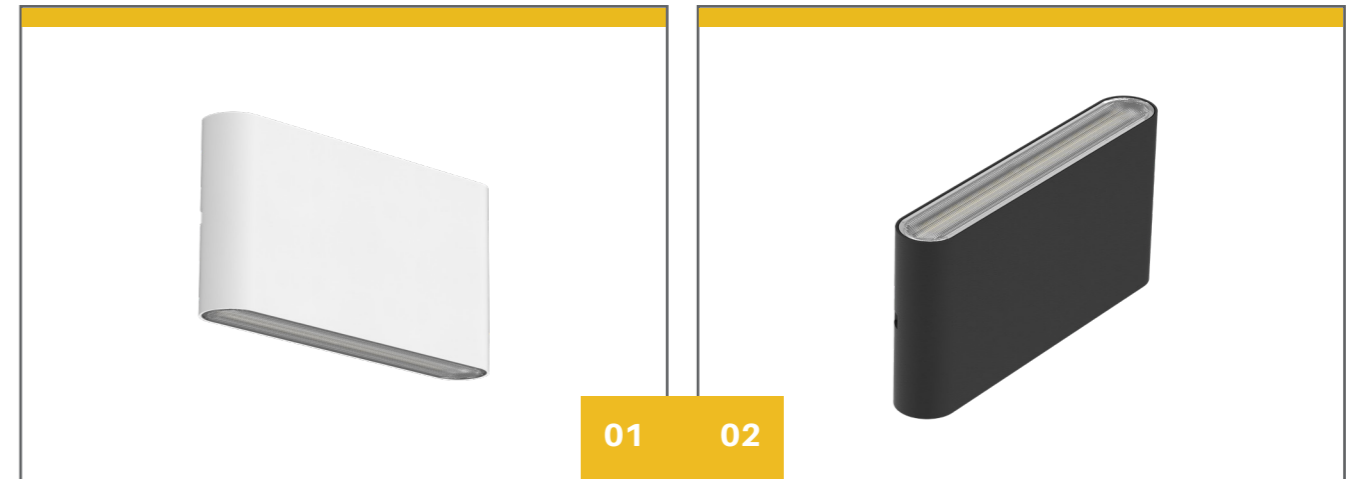


Ultra-thin with only 30mm thickness  
 Up & down lighting design  
 Wall-washer design with polarized lens 8°  
 IP65 waterproof  
 Interchangeable CCT(3000K+4000K+5700K)with slide switch  
 Internal flicker free driver  
 Life hours >50,000hrs L70  
 Type A: PC lens  
 Type B: PC diffuser

CODE	POWER (W)	LUMEN (LM)	DIMENSIONS (MM)	BEAM ANGLE
WL135N/06**075A	6	530 ~ 670	135*90*30	29°*77°*8°
WL135N/06**075B	6	420 ~ 500	135*104*30	120°
WL175N/10**075A	10	940 ~ 1,050	175*90*30	29°*77°*8°
WL175N/10**075B	10	730 ~ 820	175*104*30	120°




# Ara 76 Wall Light

The Ara 76 is a compact wall light with waterproof design. It uses a SMD light source in both ends with a PC diffuser, which offers a uniform light output. The Ara 76 is manufactured with ADC 12 aluminium for thermal management.

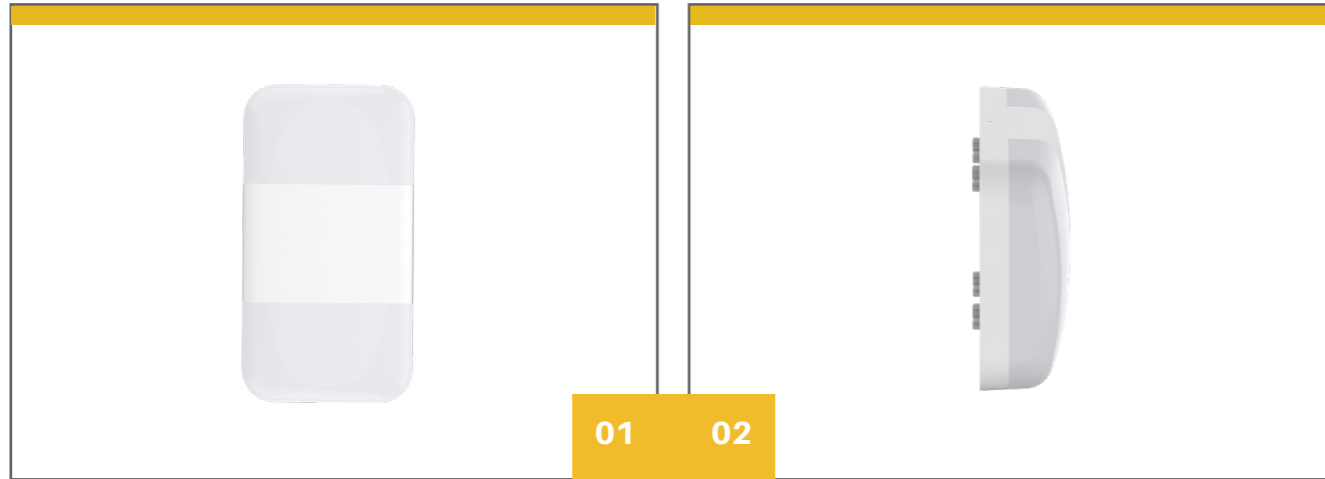


Single head/double head options  
 One hole input, two holes loop in/out available  
 Interchangeable CCT(3000K+4000K+5700K) with slide switch  
 IP65 waterproof and IK08 protection level  
 Internal flicker free driver  
 Life hours >50,000hrs L70

CODE	POWER (W)	LUMEN (LM)	DIMENSIONS (MM)	BEAM ANGLE
WL177N/07**076	7	610 ~ 750	177*130*54	80°
WL240N/14**076	14	1250 ~ 1420	240*130*54	80°

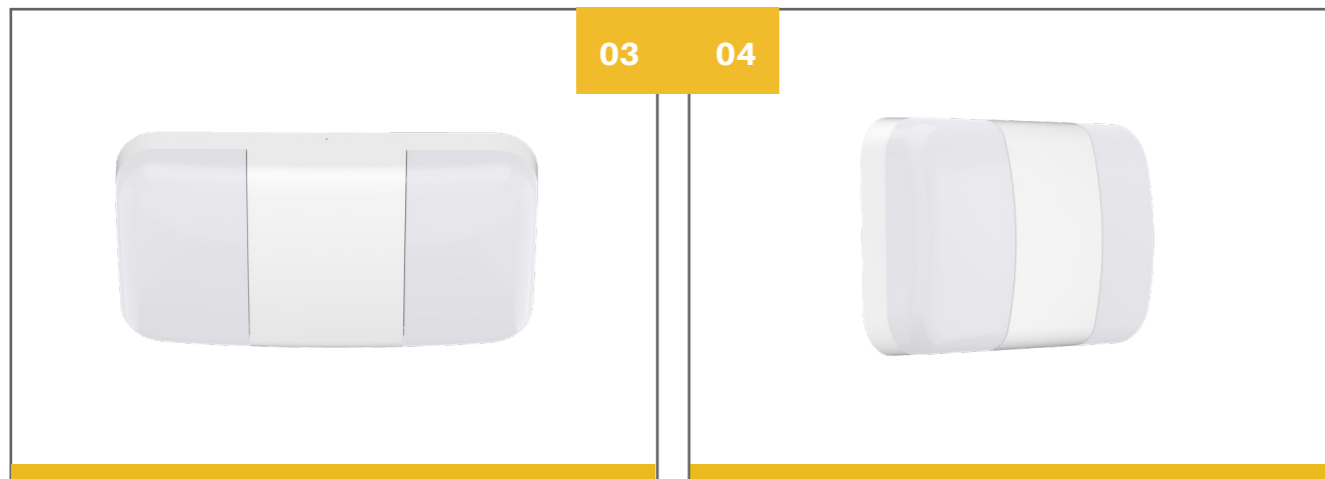




# Ara 80 Wall Light

The Ara 80 wall light is a frameless wall lamp with a large light-emitting surface. The frameless lampshade design creates a more stereoscopic lighting environment. Manufactured with SMD light source, PC diffuser and ADC 12 aluminium lamp housing.

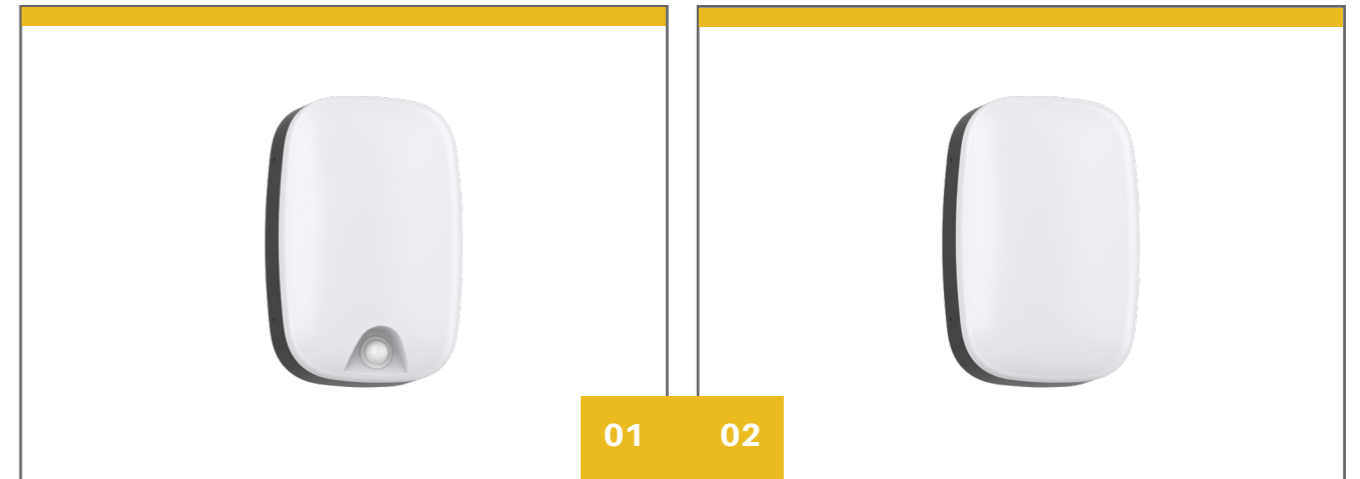

Framless design with larger lighting surface  
 ADC 12 aluminium lamp body provides great heat dissipation  
 IP65 IK08 high protection level  
 Interchangeable CCT(3000+4000+5700K) with slide switch  
 PIR sensor available  
 Non-dim and Triac dimming option  
 Life hours >50,000hrs L70


CODE	POWER (W)	LUMEN (LM)	DIMENSIONS (MM)	BEAM ANGLE
WL251N/12**080	12	1,200 ~ 1400	251*167*80	120°
WL251N/18**080	18	1450 ~ 1,900	251*167*80	120°

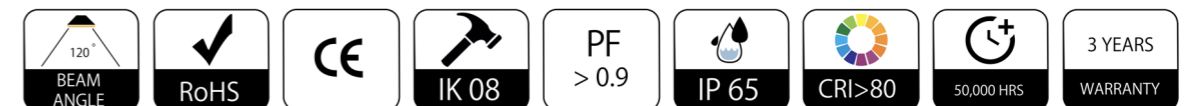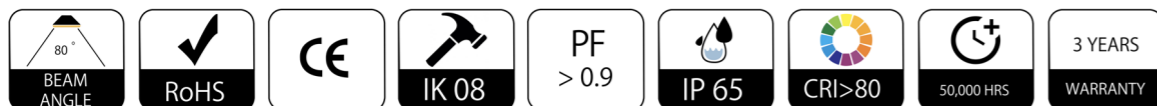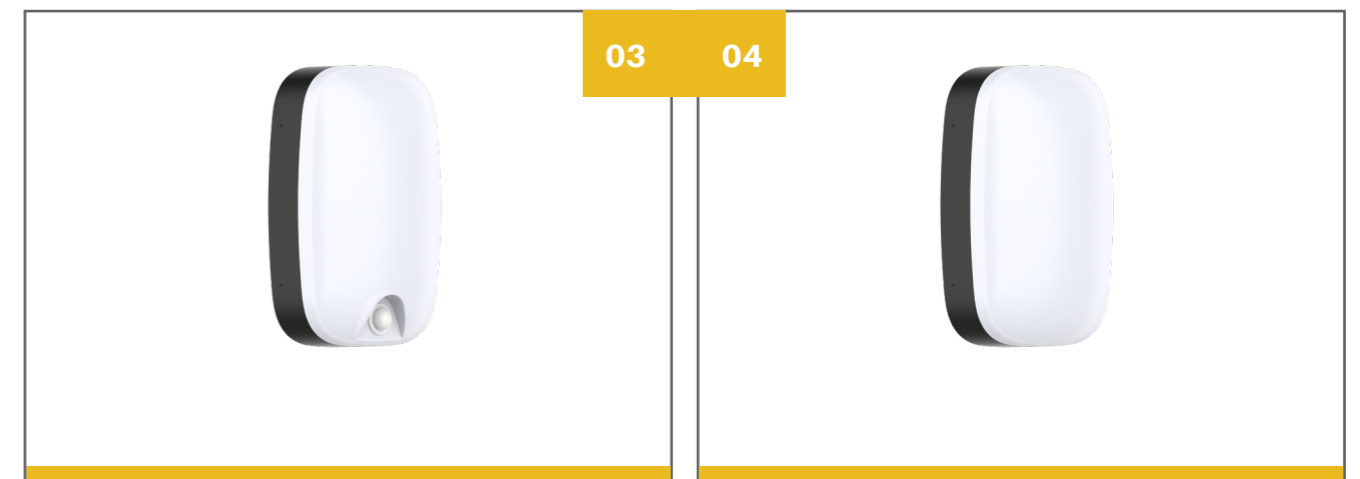




# Ara 83 Wall Light

The Ara 83 wall light is made of PC 94-V0 anti-UV plastic and the diffuser is 94-V2 corrosion-resistant. The semi-cylindrical shielding light design produces a sense of light layering, highlighting the beautiful appearance of the lamp.

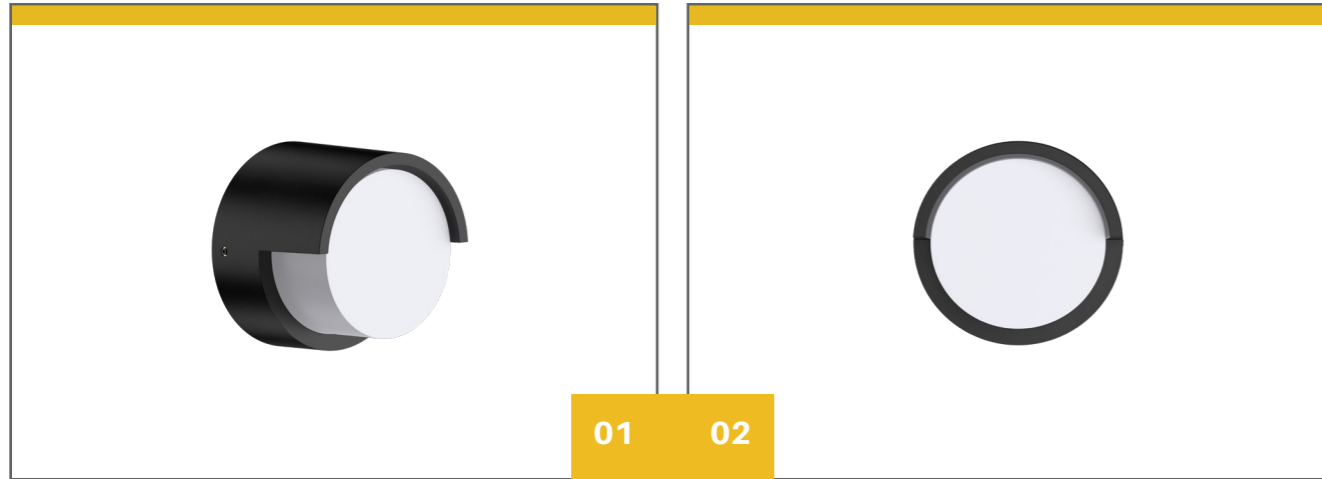


Light Weight PC body  
 One hole input, two holes loop in/out available  
 Interchangeable CCT (3000K+4000K+5700K) with slide switch  
 The semi-cylindrical shielding light design produces a sense of lighting layering  
 IP65 waterproof and IK06 protection level  
 Internal flicker free driver  
 Life hours >50,000hrs L70

CODE	POWER (W)	LUMEN (LM)	DIMENSIONS (MM)	BEAM ANGLE
WL125N/05**083	5	330 ~ 375	Ø125*95	120°
WL160N/08**083	8	590 ~ 650	Ø160*95	120°

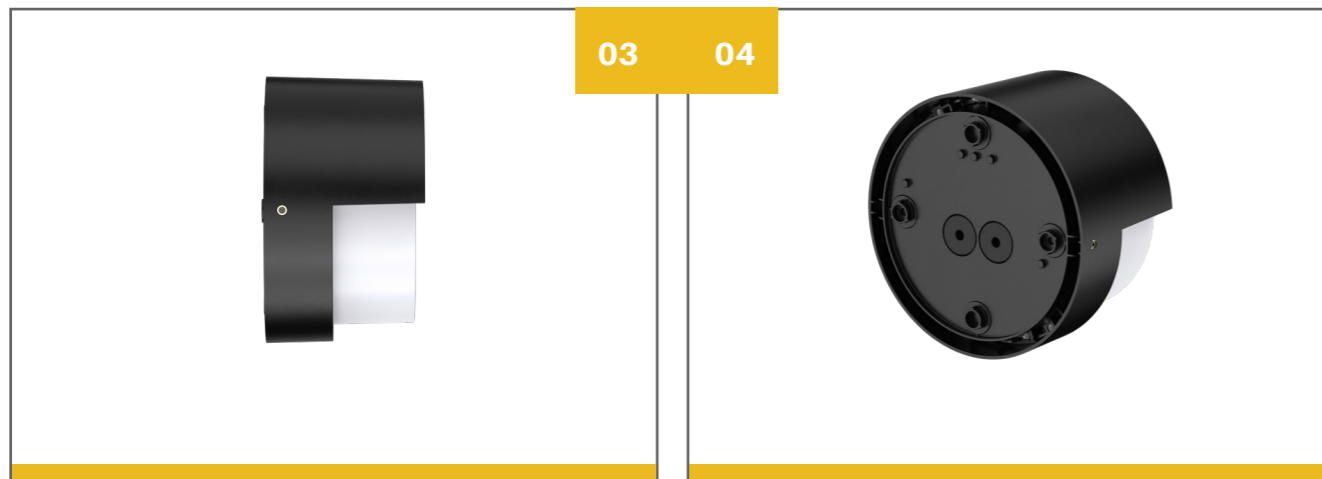




# Ara 88 Wall Light

The Ara 88 wall lamp is designed as an up & down lighting fixture. The lamp body is made of die cast aluminium, which has good heat dissipation. The lamp surface is sprayed with outdoor sand grain powder, which is corrosion resistant.

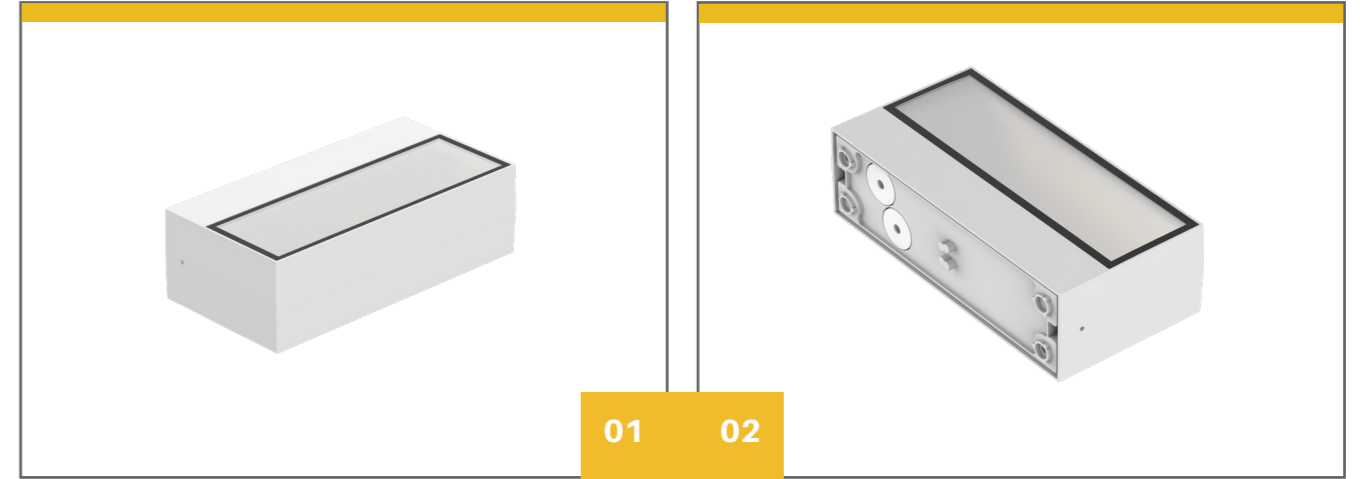


Up & down lighting design  
 IP65 waterproof  
 Special reflector provides a great wall washer effect  
 Interchangeable CCT(3000K+4000K+5700K)with slide switch  
 Loop in / loop out wire entry design  
 Internal flicker free driver  
 Life hours >50,000hrs L70

CODE	POWER (W)	LUMEN (LM)	DIMENSIONS (MM)	BEAM ANGLE
WL200N/10**088	10	600 ~750	200*100*60	60°*115°*40°
WL300N/15**088	15	850 ~1,100	300*100*60	60°*115°*40°

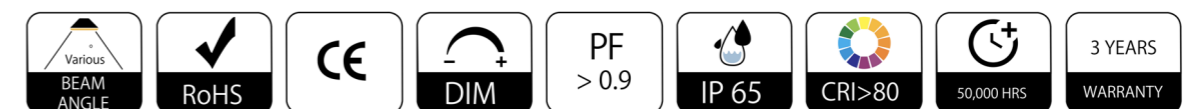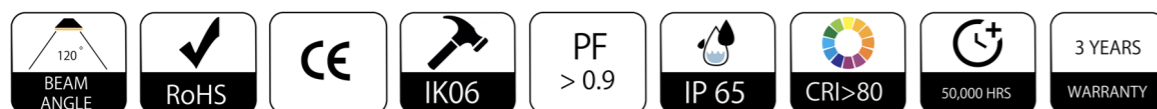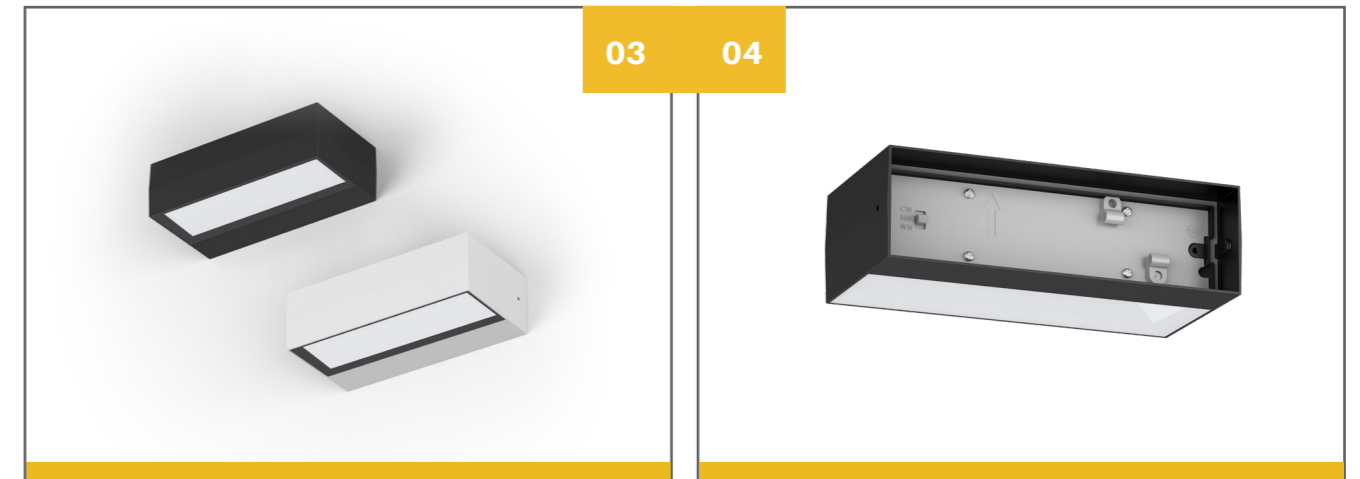


# Ara 90 Wall Light

The Ara 90 LED wall light provides a stylish architectural luminaire for outdoor applications. It has two optic designs. Ara 90A with milky PC cover for a uniform light output, Ara 90B combines reflector and transparent PC cover for down lighting. Ara 90A and Ara 90B's lighting module are interchangeable.

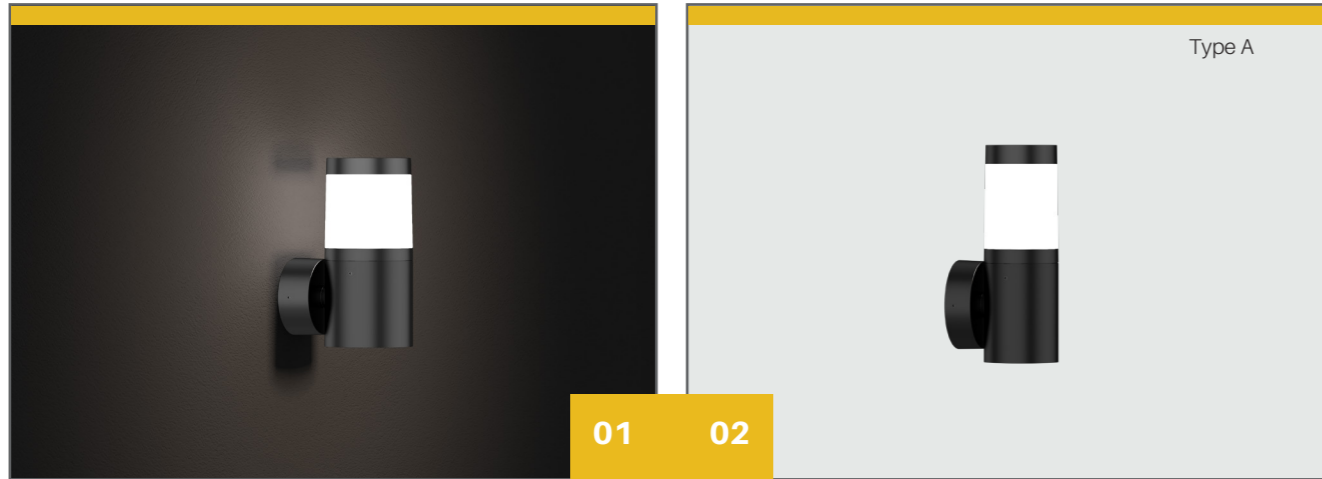


Cylindrical appearance can be harmoniously combined with a variety of applications  
Two optic designs: Ara 90A with milky PC cover, Ara 90B with reflector and transparent PC cover  
Lighting module is interchangeable  
IP65 waterproof and IK08 impact resistance  
Interchangeable CCT(3000K+4000K) with slide switch  
Life hours >50,000hrs L70

CODE	POWER (W)	LUMEN (LM)	DIMENSIONS (MM)	BEAM ANGLE
WL230N/08**090A	8	600 ~ 700	100*142*230	320°
WL230N/08**090B	8	500 ~ 600	100*142*230	360°

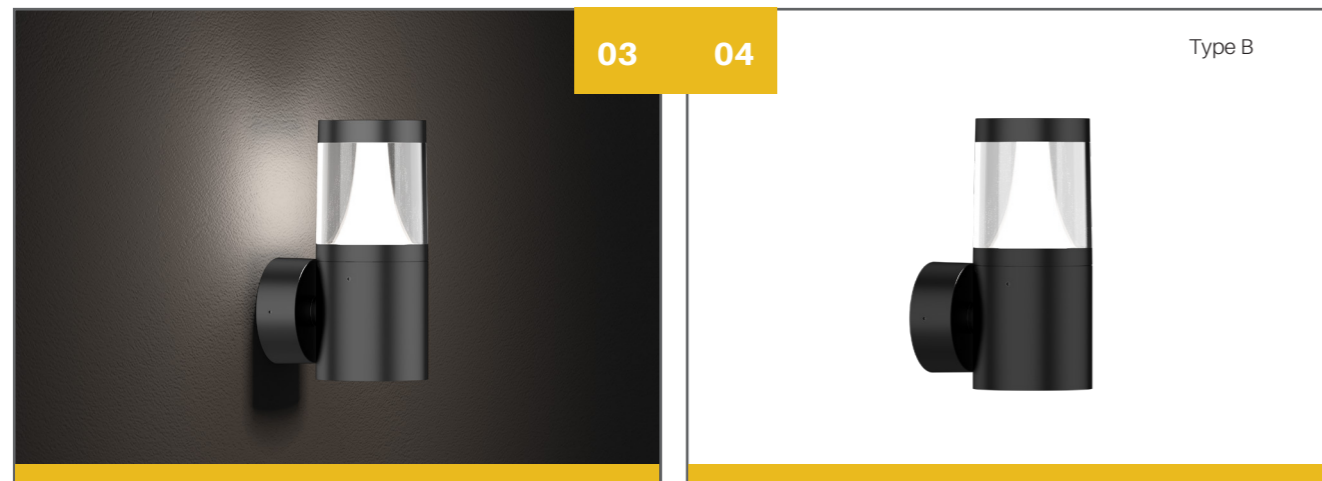

# Ara 91 Wall Light

The Ara 91 wall light is manufactured with a SMD light source and a tempered glass cover with high light transmission which offers uniform light output. ADC-12 aluminium housing with an arced surface offers a larger heat dissipation area which provides excellent thermal management.

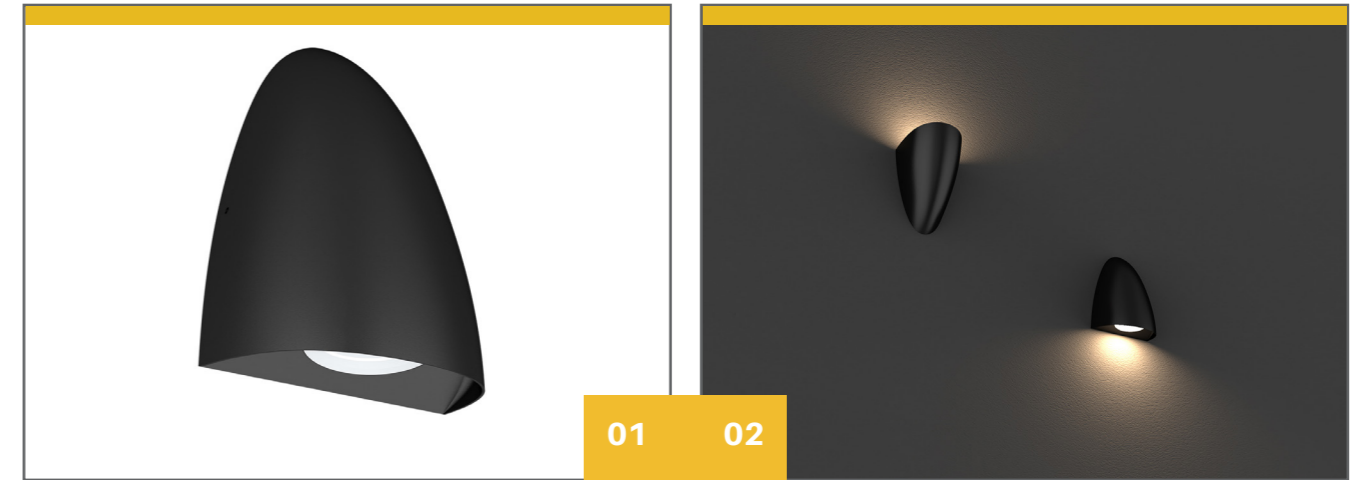

IP65 waterproof for outdoor application area  
Interchangeable CCT(3000K+4000K+5700K)with slide switch  
Internal flicker free driver  
Can be installed facing up or down  
Triac dimming for single CCT version  
Life hours >50,000hrs L70

CODE	POWER (W)	LUMEN (LM)	DIMENSIONS (MM)	BEAM ANGLE
WL202N/08**091	8	745 ~ 800	202*121*95	45°




# Ara 102 Wall Light

The Ara 102 wall light has an up & down lighting design with a smooth compact rounded decorative shape. The ADC12 aluminum housing provides excellent thermal management. The Ara 102 wall light can be supplied with CCT changeable option and is available with a white or black fixture body. The Ara 102 is suitable for indoor use.




IP20 for indoor application area  
 Up & down lighting has 120° wide beam angle  
 Interchangeable CCT(3000K+4000K+5700K)with slide switch  
 Internal flicker free driver  
 Dimming ways: Non-dim, Triac dim  
 Life hours >50,000hrs L70

CODE	POWER (W)	LUMEN (LM)	DIMENSIONS (MM)	BEAM ANGLE
WL242N/08**102	8	700 ~750	242*67*77	Up & Down120°

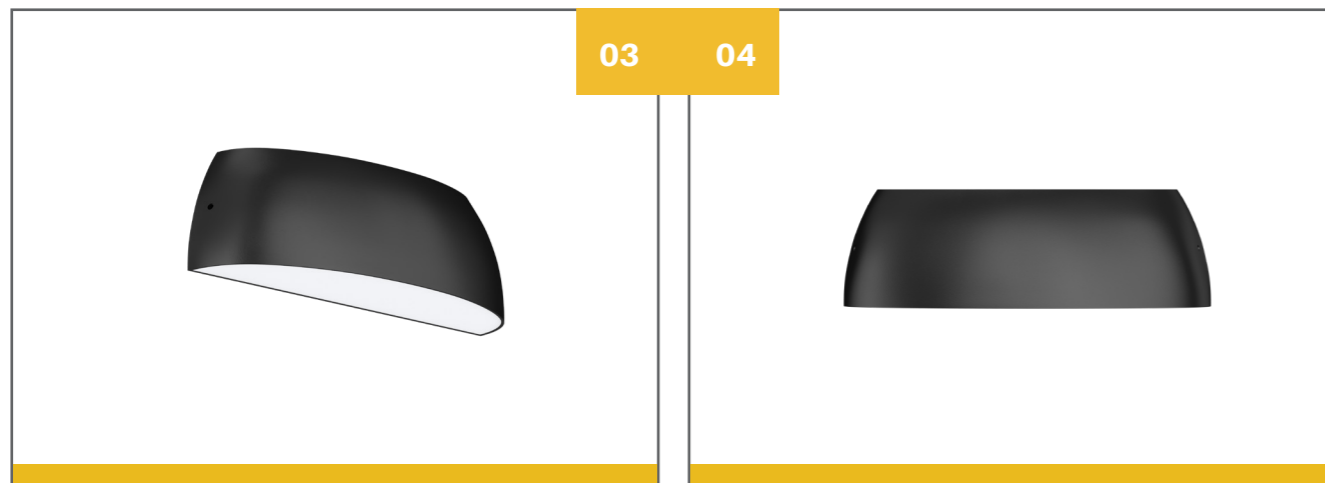

# Ara 146 Wall Light

The Ara 146 wall light is an ultra-thin design with multiple length options. It has a high lumen SMD light, wall-washing design for optical effect.

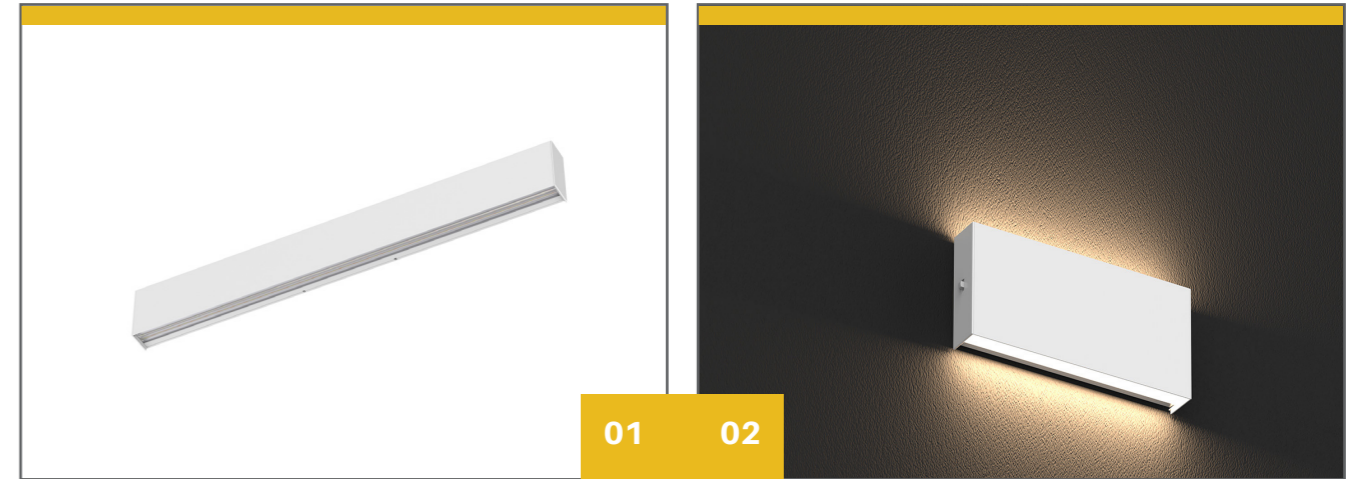

Quick installation: Male plug+female plug, fast connector  
 Up & down lighting, wall-washer design creates a better lighting atmosphere  
 High lumen efficiency, 100lm/W  
 Interchangeable CCT(3000K+4000K) with slide switch  
 Multiple lengths: 180mm/240mm/360mm/600mm  
 Non-dim and Triac dim available  
 Internal flicker free driver  
 Life hours >50,000hrs L70

CODE	POWER (W)	LUMEN (LM)	DIMENSIONS (MM)	BEAM ANGLE
WL180N/08**146	8	700 ~ 1,000	180*38*90	40°
WL240N/10**146	10	900 ~ 1,200	240*38*90	40°
WL360N/16**146	16	1,500 ~ 1,900	360*38*90	40°
WL600N/20**146	20	1,900 ~ 2,300	600*38*90	40°



# Astro 01 Wall Pack

The Astro 01 wall pack uses the latest Nichia chips with 140lm/W luminous efficacy. It has a professional optical lens with 93% light transmittance. The Astro 01 wall pack is highly efficient, low UGR and has asymmetrical light distribution. The Astro 01 delivers uniform light and increases security for building exteriors and courtyards.



IP65 rating, EVA board on the back preventing water from flowing in  
 Corrosion resistance: Outdoor polyester & anti-corrosion material coating  
 Driver located at the grille heat sink helps excellent dissipation performance  
 Uniform asymmetrical light distribution, illuminating the area without light pollution  
 Life hours  
 67,000hrs-L90  
 146,000hrs-L80  
 236,000hrs-L70

CODE	POWER (W)	LUMEN (LM)	DIMENSIONS (MM)	BEAM ANGLE
WP3N/040**001	40	5,000	296*150*223	asymmetrical
WP3N/070**001	70	8,750	296*150*223	asymmetrical



# Astro 05 Wall Pack

The Astro 05 wall pack light is slim, low profile, light weight and designed for long life usage with no maintenance and great performance. This light is designed for easy retrofitting of existing wall pack lights.



Silver / bronze options  
 Powder coated die cast aluminium  
 10W, 20W, 30W 40W, 70W, are available  
 Efficiency up to 125lm/W


CCT: 4000K (3000k / 5000K optional)  
 IK08 protection  
 IP66 waterproof level  
 Body colour: Bronze or silver / grey  
 Life hours  
 45,000hrs-L90  
 100,000hrs-L80  
 167,000hrs-L70

CODE	POWER (W)	LUMEN (LM)	DIMENSIONS (MM)
WP2N/010**005	10	1,250	196*96*186
WP2N/020**005	20	2,500	196*96*186
WP2N/030**005	30	3,750	196*96*186
WP2N/040**005	40	5,000	282*125*205
WP2N/070**005	70	8,750	282*125*205



# Astro 06 Wall Pack


The Astro 06 wall pack has a slim and elegant design which ensures discreet integration without compromising on performance. Suited to various applications such as building exteriors, outdoor corridors, garages, pathways and other outdoor environments. The Astro 06 wall pack not only provides energy efficient lighting, but it delivers a bright white light to ensure perfect visibility and comfort at all times.

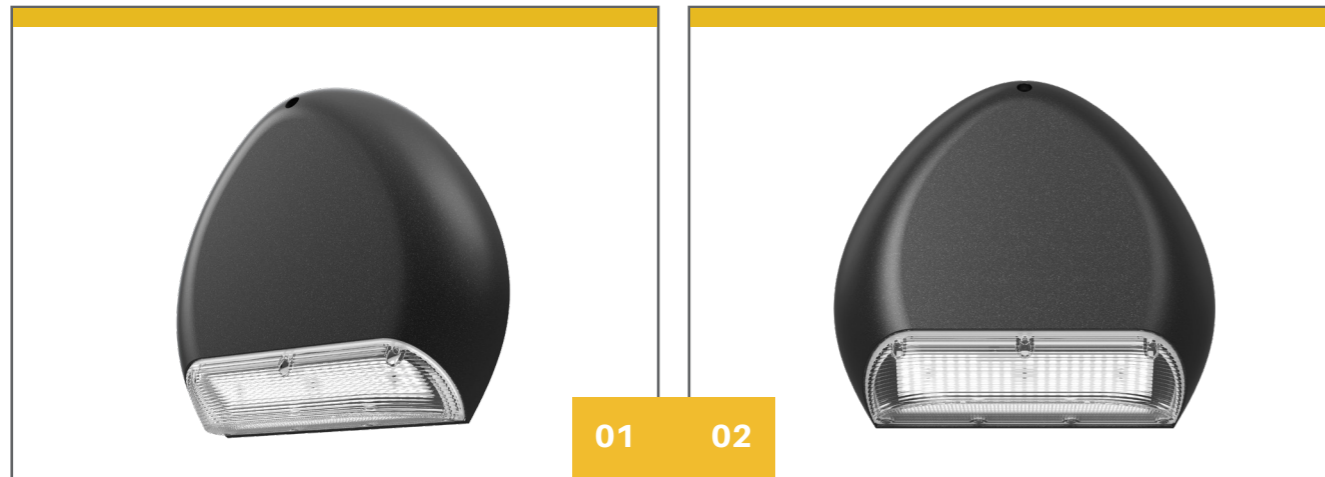

Wall mounting, easy installation with removable back plate  
 IP66, IK10, 10KV  
 TYPE IV beam angle provides high level of visibility  
 15W, 25W, 35W, 45W, 55W are available  
 Efficiency up to 140lm/W  
 Photocell is optional


CCT: 4000K (3000k/5000K optional)  
 IK10 protection  
 IP66 waterproof level  
 Body colour textured black RAL 9005  
 Life hours  
 54000hrs-L90  
 82000hrs-L80  
 131000hrs-L70

CODE	POWER (W)	LUMEN (LM)	DIMENSIONS (MM)
WP2N/015**006	15	1,950	293*97*289
WP2N/025**006	25	3,250	293*97*289
WP2N/035**006	35	4,550	293*97*289
WP2N/045**006	45	5,850	293*97*289
WP2N/050**006	55	7,150	293*97*289

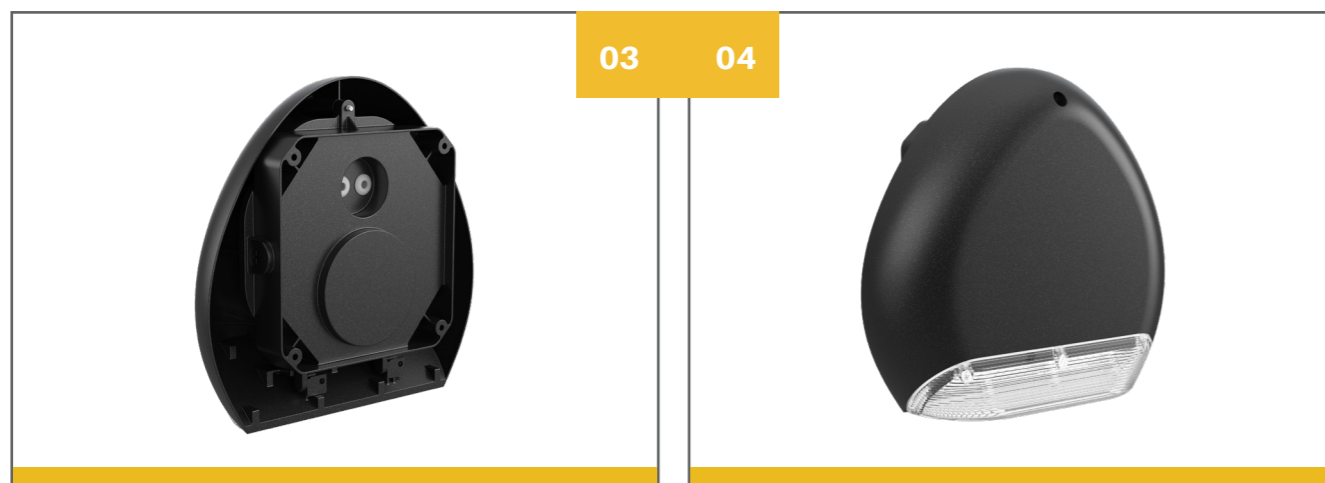

# Astro 07 Wall Sconce Light


The Astro 07 LED cylinder outdoor wall washer, up and down sconce light. The attractive structure brings life to outdoor facades. A variety of beam angles are available with light emission both up and down. The Astro 07 wall sconce is a direct/indirect wall luminaire, that brings decorative and functional illumination in perfect balance.

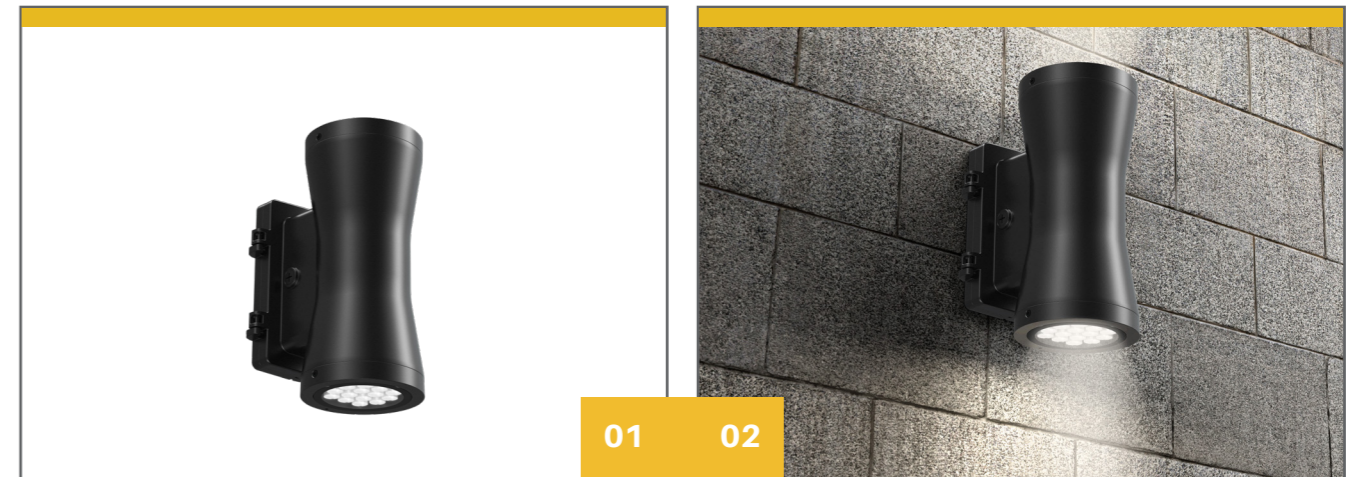

Power: 10W 20W 30W (Up / down)  
 Power: 20W 40W 60W (Both sides lighting emission)  
 Light distribution: Up / down / both side lighting emission  
 Beam angle: 12°/30°/60°/15°/30°/20°/60°  
 Housing: made of die-cast aluminium


CCT: 2700K/3000K/4000K/5000K  
 IK08 protection  
 IP66 waterproof level  
 Body colour: textured black RAL 9017  
 Life hours  
 110,000hrs-L90  
 120,000hrs-L80  
 130,000hrs-L70

CODE	POWER (W) UP	POWER (W) DOWN	LUMEN (LM)	DIMENSIONS (MM)	BEAM ANGLE
WP2N/020**007	10	10	2,400	360*230*170	Up & Down
WP2N/040**007	20	20	4,800	360*230*170	Up & Down
WP2N/060**007	30	30	7,200	360*230*170	Up & Down

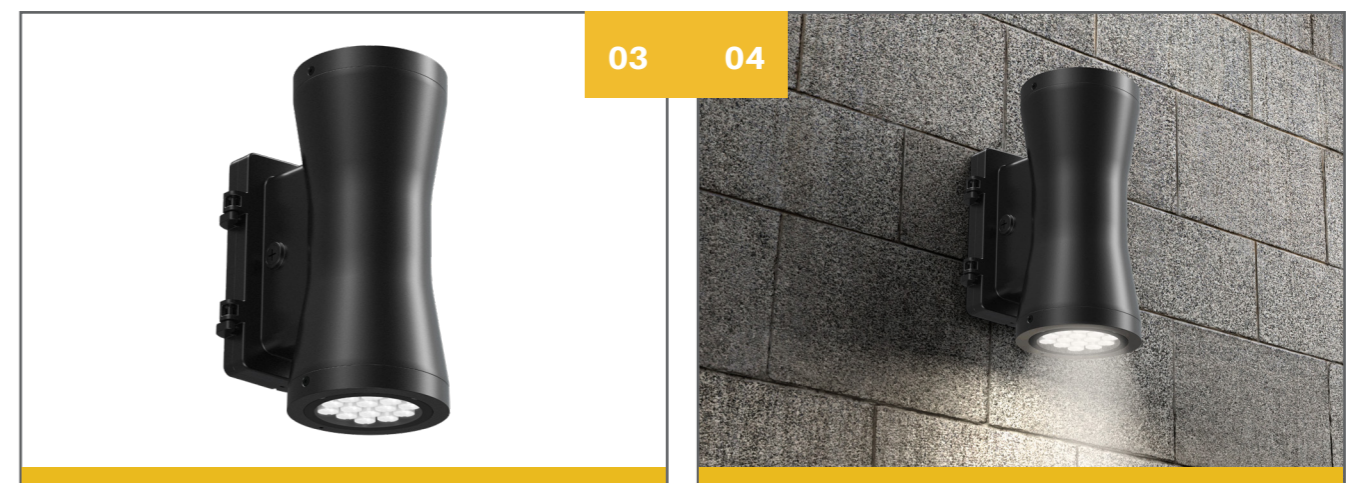

# Subra 65 A Bulkhead



The Subra 65 A bulkhead is a premium wall / ceiling mounted fixture. The fitting has an aluminium trim and 94-V0 fire rated PC cover and has a 110° beam angle. The Subra 65 A is available with integrated emergency optional.

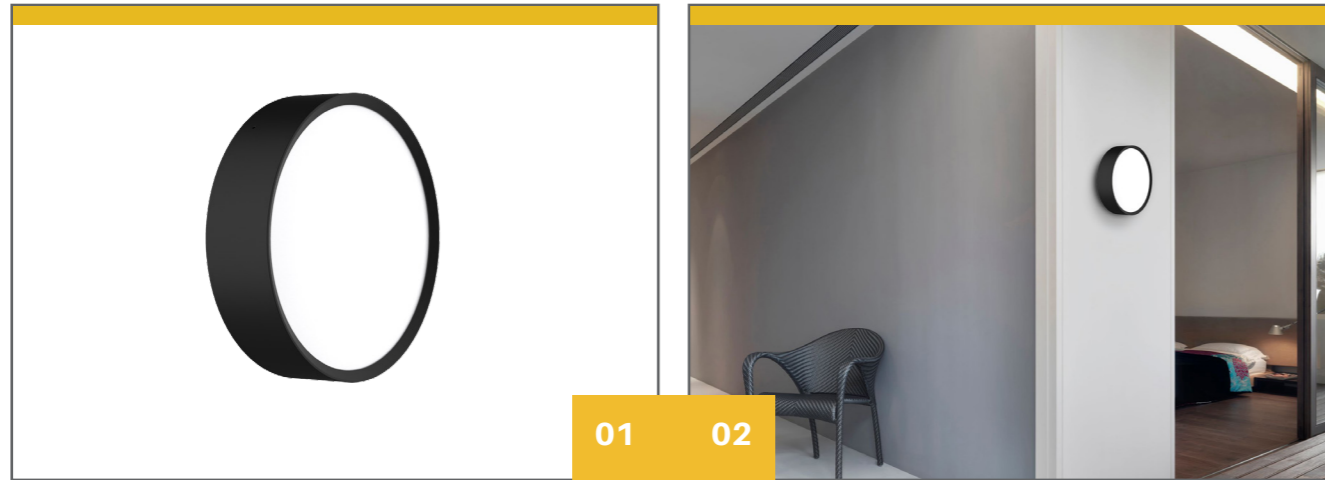

Wall / ceiling mounted  
Aluminium body  
94-V0 PC cover  
Integrated emergency optional  
Efficiency up to 100lm/W  
Beam angle: 110°


CCT: 3000k /4000k/ 5000k, 5700K  
CCT: adjustable optional  
IK10 protection  
IP65 waterproof level  
Body colour: black / white  
Life hours >50,000hrs  
Triac dimmable

CODE	POWER (W)	LUMEN (LM)	DIMENSIONS (MM)
BH12**/65A/R*	12	1,050 ~ 1,250	Ø250*58
BH18**/65A/R*	18	1,500 ~ 1,850	Ø250*58
BHE12**/66A/R*	12	900 ~ 1,100	Ø250*74

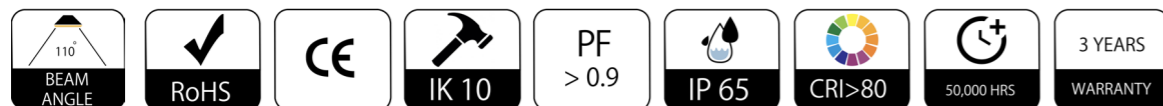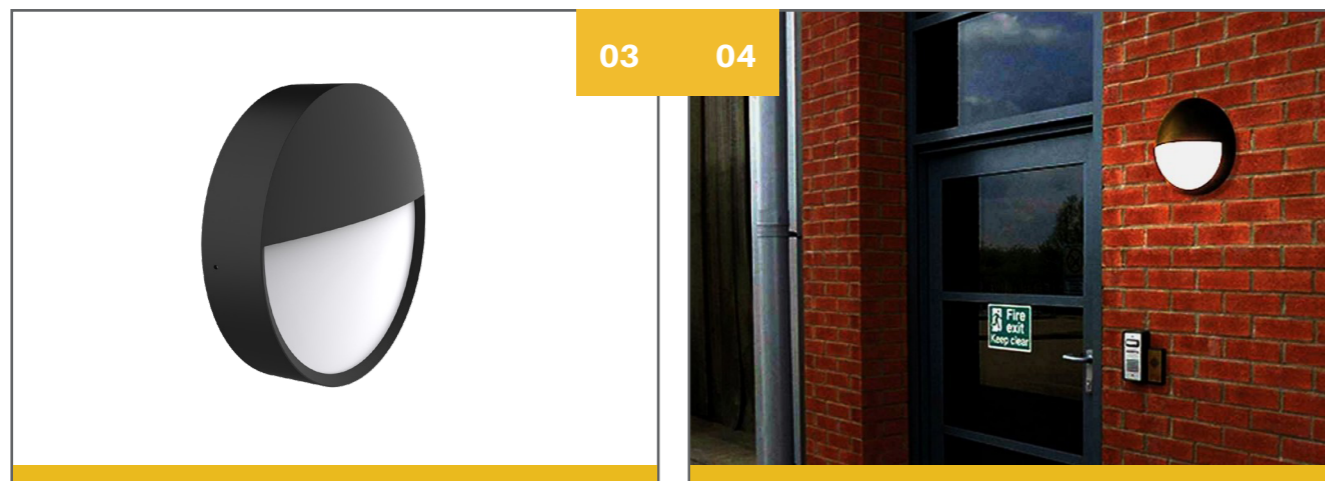

# Subra 65 B Bulkhead


Subra 65 B is a premium decorative surface mounted ceiling / wall light. It has two interchangeable frames, with or without trim, enabling architectural variation. The Subra 65 B has a high lumen 2835 light source and PC diffuser, with high light transmission and uniform light distribution. The Subra 65 B is multi functional with adjustable sensor, interchangeable CCT and emergency options.

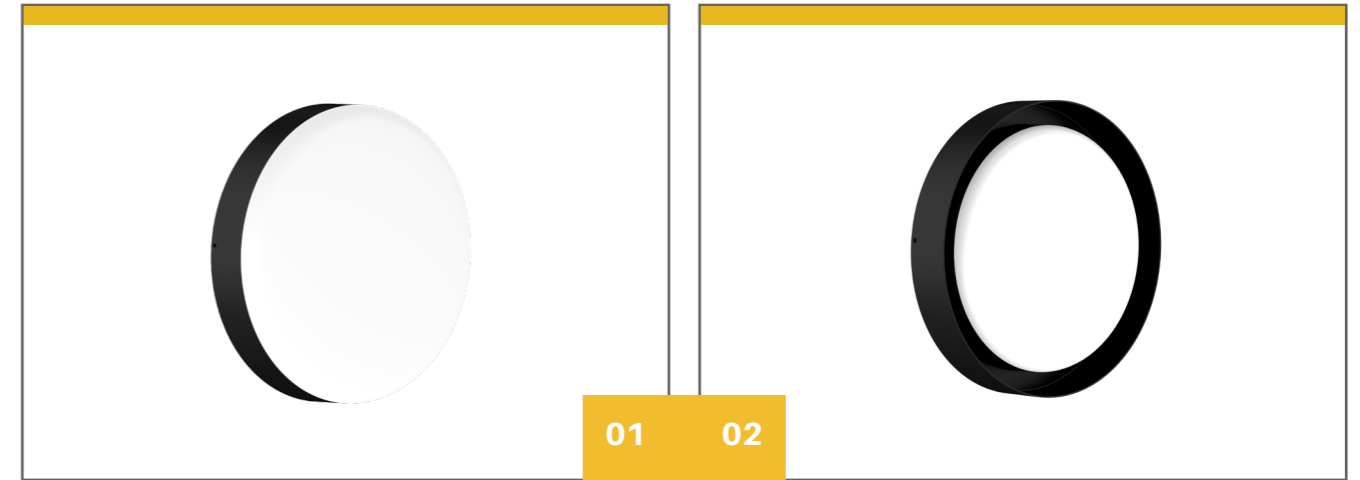

Wall / ceiling mounted  
Aluminium body  
94-V0 PC cover  
Integrated emergency optional on Subra 65 B without trim  
Efficiency > 100lm/W  
Beam angle: 120°


CCT: 3000k /4000k/ 5000k, 5700K  
CCT: adjustable optional  
IK08 protection  
IP65 waterproof level  
Body colour: black / white  
Life hours >50,000hrs  
Triac dimmable

CODE	POWER (W)	LUMEN (LM)	DIMENSIONS (MM)
BH12**/65B/R*	12	1,200 ~ 1,380	Ø250*64
BH18**/65B/R*	18	1,750 ~ 2,050	Ø250*64
BHT12**/65B/R*	12	1200 ~ 1,350	Ø300*64
BHT18**/65B/R*	18	1,780 ~ 2,020	Ø300*64

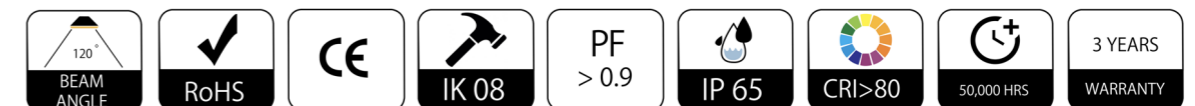

# Subra 65 C Bulkhead (Halo)



Subra 65 C is a premium decorative surface mounted ceiling / wall light. It has two interchangeable frames, halo and halo eyelid, enabling architectural variation. The Subra 65 C has a high lumen 2835 light source and PC diffuser, with high light transmission and uniform light distribution. The Subra 65 C is multi functional with adjustable sensor, interchangeable CCT and emergency options.

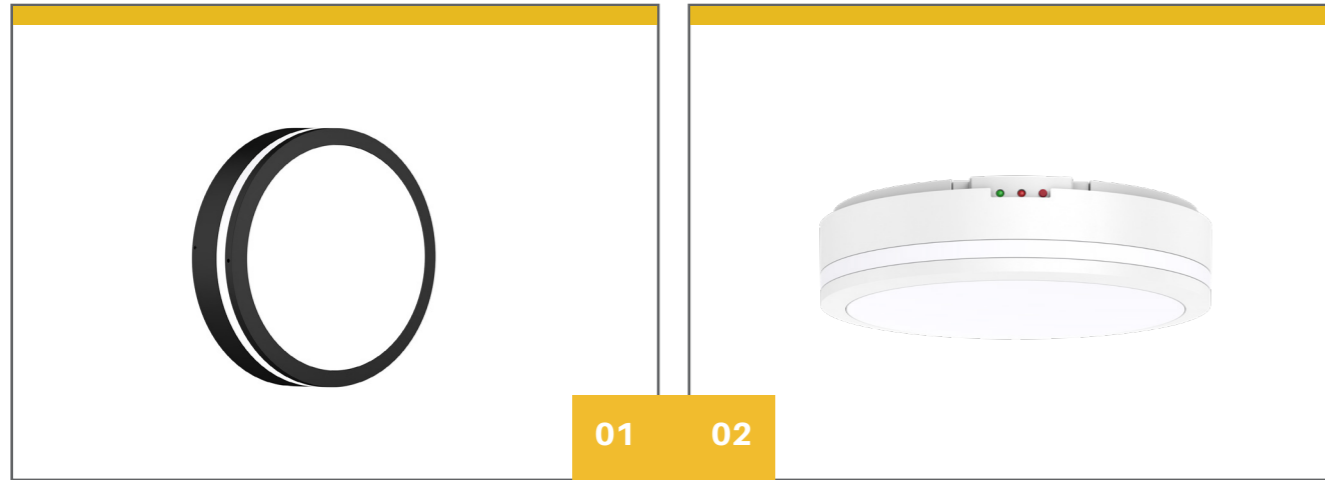

Wall / ceiling mounted  
Aluminium body  
94-V0 PC cover  
Integrated emergency optional  
Efficiency > 100lm/W  
Beam angle: 120°


CCT: 3000k / 4000k / 5000k, 5700K  
CCT: adjustable optional  
IK08 protection  
IP65 waterproof level  
Body colour: black / white  
Life hours >50,000hrs  
Triac dimmable

CODE	POWER (W)	LUMEN (LM)	DIMENSIONS (MM)
BH12**/65C/R*	12	920 ~ 1,000	Ø251*75
BH18**/65C/R*	18	1,340 ~ 1,500	Ø251*75
BHE12**/66C/R*	12	550 ~ 700	Ø251*75
BHE18**/66C/R*	18	800 ~ 950	Ø251*75

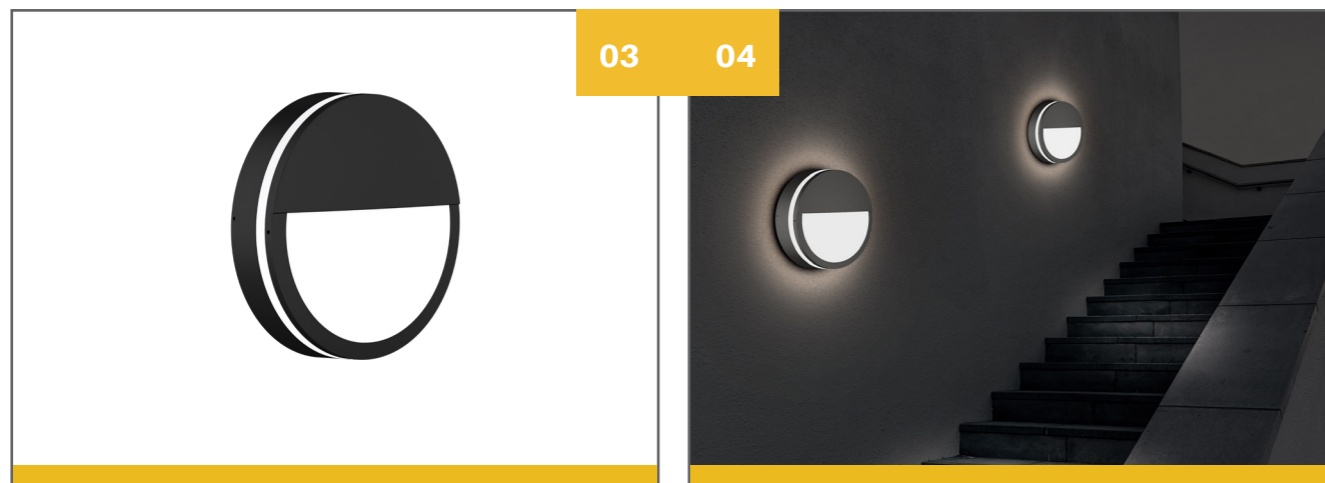

# Subra 91 Bulkhead (Round)


The Subra 91 is a multi-function LED bulkhead that can be supplied in circular, semicircle, square or oval shapes. The Subra 91 is manufactured with thermal plastic and a fire rated PC cover.

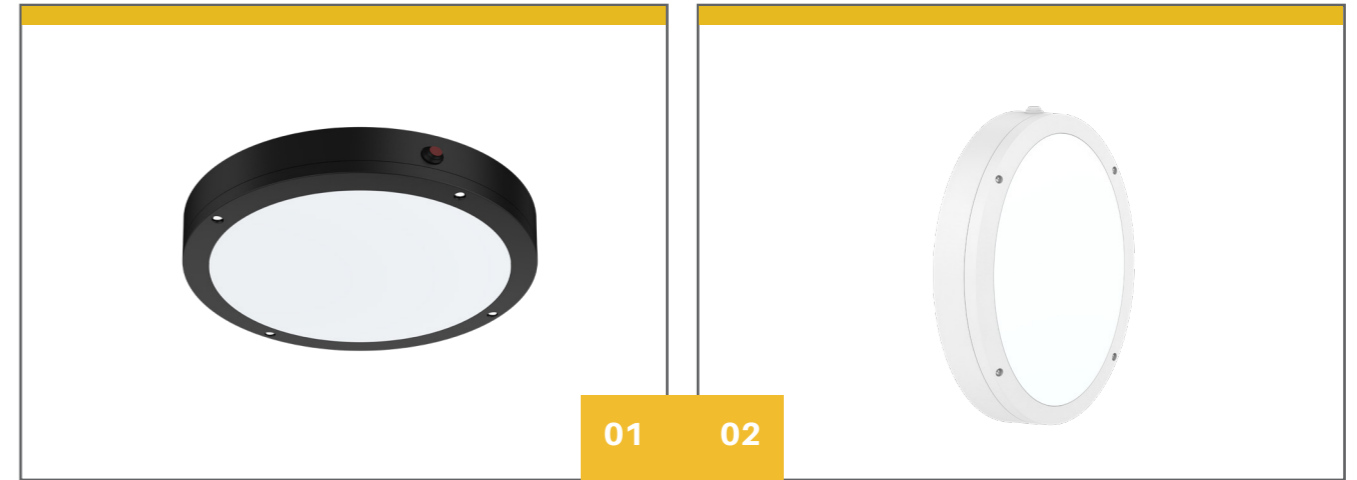

Wall / ceiling mounted  
Thermal plastic body  
94-V0 PC cover  
Efficiency up to 100lm/W  
Beam angle: 110°  
Multi function: power adjustable (optional)  
Emergency / sensor adjustable (optional)


CCT: 3000K / 4000K / 5000K / 5700K  
CCT: adjustable optional  
IK10 protection  
IP65 waterproof level  
Body colour: black RAL 9005 / white RAL9016  
Life hours >50,000hrs  
Triac / DALI / 0-10V dimmable

CODE	POWER (W)	LUMEN (LM)	DIMENSIONS (MM)
BH12**/91/R*	12	1,000 ~ 1,200	Ø275*59
BHS12**/91/R*	12	1,000 ~ 1,200	Ø275*59
BH18**/91/R*	18	1,480 ~ 1,750	Ø275*59
BHS18**/91/R*	18	1,480 ~ 1,750	Ø275*59
BH25**/91/R*	25	2,140 ~ 2,420	Ø350*59
BHS25**/91/R*	25	2,140 ~ 2,420	Ø350*59
BH30**/91/R*	30	2,520 ~ 2,800	Ø350*59
BHS30**/91/R*	30	2,520 ~ 2,800	Ø350*59

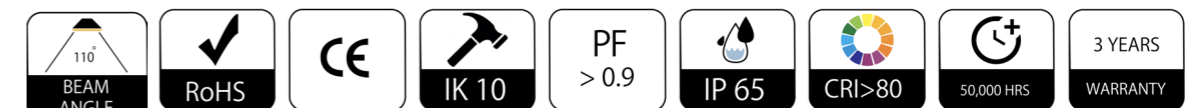

# Subra 91 Bulkhead (Oval)

The Subra 91 is a multi-function LED bulkhead that can be supplied in circular, semicircle, square or oval shapes. The Subra 91 is manufactured with thermal plastic and a fire rated PC cover.

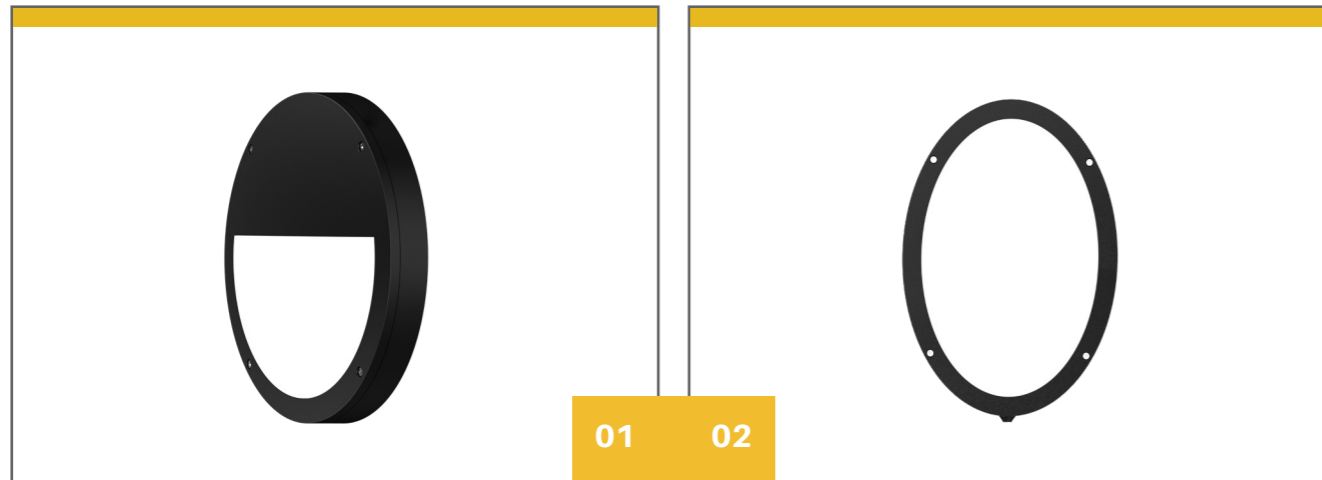


Wall / ceiling mounted  
Thermal plastic body  
94-V0 PC cover  
Efficiency up to 100lm/W  
Beam angle: 110°  
Emergency / sensor adjustable (optional)

CCT: 3000K / 4000K / 5000K / 5700K  
CCT: adjustable optional  
IK10 protection  
IP65 waterproof level  
Body colour: black RAL 9005 / white RAL9016  
Life hours >50,000hrs  
Triac / DALI / 0-10V dimmable

CODE	POWER (W)	LUMEN (LM)	DIMENSIONS (MM)
BH12**/91/O*	12	1,000 ~ 1,200	320*230*60
BHS12**/91/O*	12	1,000 ~ 1,200	320*230*60
BH18**/91/O*	18	1,480 ~ 1,750	320*230*60
BHS18**/91/O*	18	1,480 ~ 1,750	320*230*60
BH25**/91/O*	25	2,140 ~ 2,420	320*230*60
BHS25**/91/O*	25	2,140 ~ 2,420	320*230*60

# Subra 91 Bulkhead (Square)


The Subra 91 is a multi-function LED bulkhead that can be supplied in circular, semicircle, square or oval shapes. The Subra 91 is manufactured with thermal plastic and a fire rated PC cover.

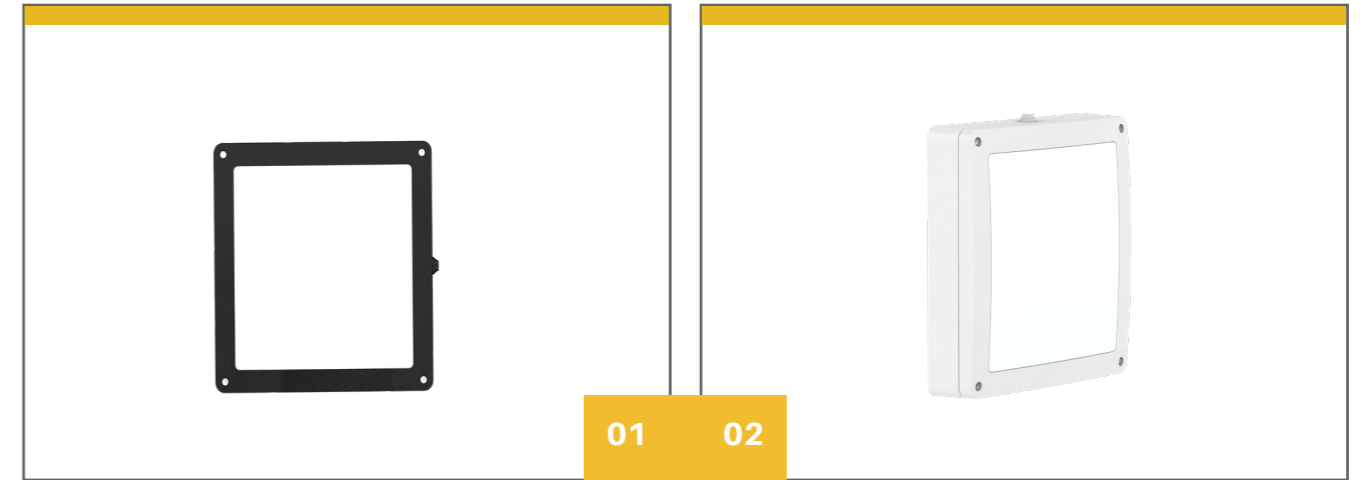

Wall / ceiling mounted  
Thermal plastic body  
94-V0 PC cover  
Efficiency up to 100lm/W  
Beam angle: 110°  
Emergency / sensor adjustable (optional)

CCT: 3000K / 4000K / 5000K / 5700K  
CCT: adjustable optional  
IK10 protection  
IP65 waterproof level  
Body colour: black RAL 9005 / white RAL9016  
Life hours >50,000hrs  
Triac / DALI / 0-10V dimmable


CODE	POWER (W)	LUMEN (LM)	DIMENSIONS (MM)
BH12**/91/RB	12	1,000 ~ 1,200	242*242*59
BHS12**/91/RB	12	1,000 ~ 1,200	242*242*59
BH18**/91/RB	18	1,480 ~ 1,750	242*242*59
BHS18**/91/RB	18	1,480 ~ 1,750	242*242*59
BH25**/91/RB	25	2,140 ~ 2,420	242*242*59
BHS25**/91/RB	25	2,140 ~ 2,420	242*242*59
BH30**/91/RB	30	2,520 ~ 2,800	242*242*59
BHS30**/91/RB	30	2,520 ~ 2,800	242*242*59





# Subra 91 Bulkhead (Halo)

The Subra 91 is a multi-function LED bulkhead that can be supplied in circular, semicircle, square or oval shapes. The Subra 91 is manufactured with thermal plastic and a fire rated PC cover.

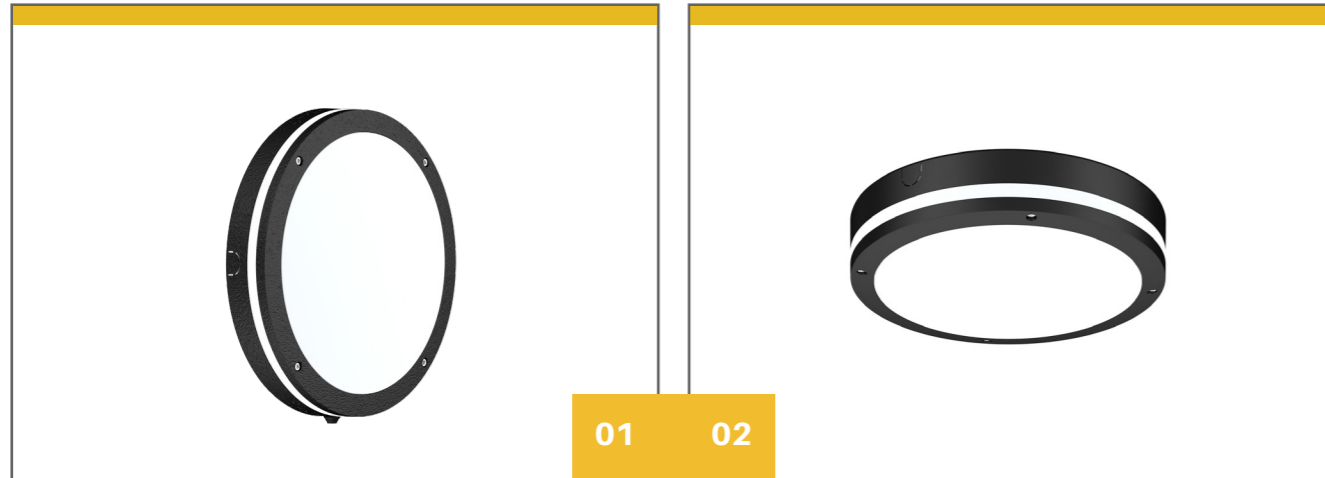


Wall / ceiling mounted  
Thermal plastic body  
94-V0 PC cover  
Efficiency up to 100lm/W  
Beam angle: 110°  
Multi function: power adjustable  
Emergency / sensor adjustable (optional)

CCT: 3000K / 4000K / 5000K / 5700K  
CCT: adjustable optional  
IK10 protection  
IP65 waterproof level  
Body colour: black RAL 9005 / white RAL9016  
Life hours >50,000hrs  
Triac / DALI / 0-10V dimmable

CODE	POWER (W)	LUMEN (LM)	DIMENSIONS (MM)
BH12**/91H/R*	12	920 ~1,120	Ø275*67
BHS12**/91H/R*	12	920 ~1,120	Ø275*67
BHE12**/91H/R*	12	600 ~720	Ø275*68
BHES12**/91H/R*	12	600 ~720	Ø275*68
BH18**/91H/R*	18	1,450 ~1,620	Ø275*67
BHS18**/91H/R*	18	1,450 ~1,620	Ø275*67
BHE18**/91H/R*	18	900 ~1,080	Ø275*68
BHES18**/91H/R*	18	900 ~1,080	Ø275*68
BH25**/91H/R*	25	1,920 ~ 2,200	Ø275*67
BHS25**/91H/R*	25	1,920 ~ 2,200	Ø275*67
BHE25**/91H/R*	25	1,250 ~ 1,460	Ø275*68
BHES25**/91H/R*	25	1,250 ~ 1,460	Ø275*68

# Subra 96 Bulkhead

The Subra 96 is a light weight LED bulkhead that can be wall or ceiling mounted. It is manufactured with thermal plastic and a fire rated PC cover. The base and shade are detachable, providing versatility, ease of maintenance and installation.

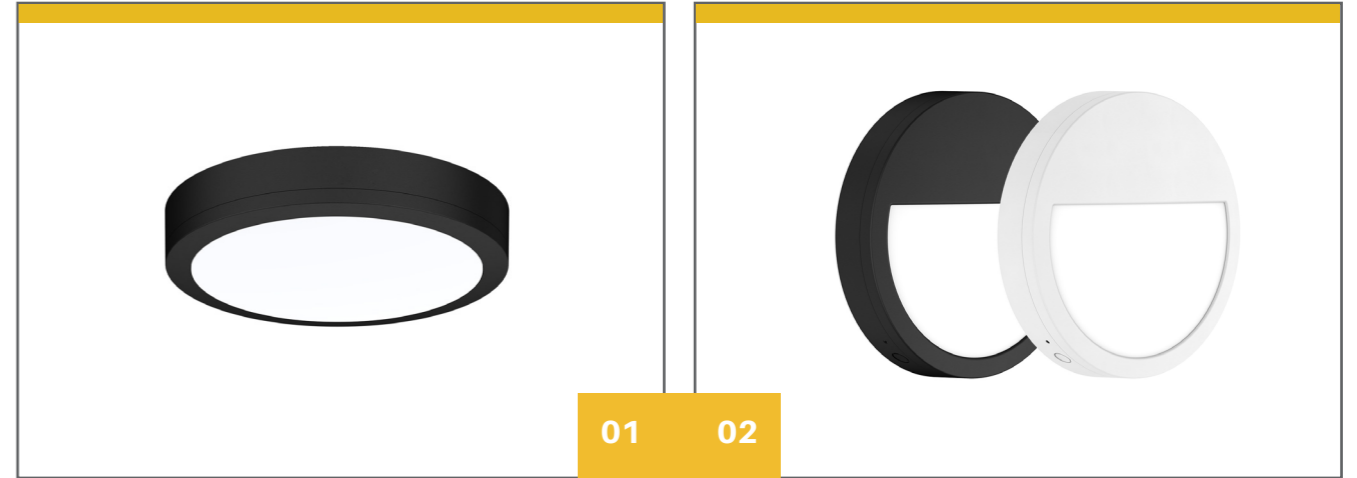

Wall / ceiling mounted  
Thermal plastic body  
94-V0 PC cover  
Efficiency up to 100lm/W  
Beam angle: 110°  
Multi function: power adjustable  
Emergency / sensor adjustable (optional)

CCT: 3000K / 4000K / 5000K / 5700K  
CCT: adjustable optional  
IK10 protection  
IP65 waterproof level  
Body colour: black RAL 9005 / white RAL9016  
Life hours >50,000hrs  
Triac / DALI / 0-10V dimmable

CODE	POWER (W)	LUMEN (LM)	DIMENSIONS (MM)
BH12**/96/RB	12	1,050 ~1,250	Ø275*60
BH12**/96/RBE	12	1,050 ~1,250	Ø275*60
BHS12**/96/RB	12	1,050 ~1,250	Ø275*60
BHE12**/96/RB	12	740 ~800	Ø275*60
BH18**/96/RB	18	1,580 ~1,850	Ø275*60
BH18CC/96/RB	18	1,580 ~1,850	Ø275*60
BH18**/96/RBE	18	1,580 ~1,850	Ø275*60
BHS18**/96/RB	18	1,580 ~1,850	Ø275*60
BHE18**/96/RB	18	940 ~1,100	Ø275*60
BH25**/96/RB	25	2,240 ~ 2,520	Ø275*60
BH25**/96/RBE	25	2,240 ~ 2,520	Ø275*60
BHS25**/96/RB	25	2,240 ~ 2,520	Ø275*60
BHE25**/96/RB	25	1,400 ~ 1,550	Ø275*60
BH30**/96/RB	30	2,620 ~ 2,900	Ø350*60
BHS30**/96/RB	30	2,620 ~ 2,900	Ø350*60

