

Ceiling Light Series

The Eclipse ceiling light series is carefully selected to provide modern, reliable and functional ceiling lights for residential and commercial applications. The Eclipse series supports architectural flexibility and exceptional performance.

04



Eclipse ceiling lights are perfect for residential and commercial applications. The range offers variety and selection to suit any architectural requirement.

The Eclipse ceiling light range offers the end user or architect the flexibility of choice to achieve the design vision and concept with ease. Eclipse ceiling lights are designed to enable ease of installation, longevity and architectural design.

Eclipse ceiling lights are available with various options including:
CCT changing
Dimming
Occupancy sensors

Typically the ceiling lights have a water resistance or waterproof ingress protection.

Eclipse 08 Ceiling Light

This ceiling light is a super slim design fixture. A high lumen SMD LED and lighter weight fire-rated material ensures better heat resistance and corrosion resistance. The CCT is interchangeable between 3000K, 4000K and 5700K by changing a slide switch and also dimmable with Triac dimmers (Optional).



Surface mounted IP54
Dimmable when using Triac dimmer
120° wide beam angle
Fire-rated PC diffuser
Integrated emergency and occupation sensor options
Life hours >40,000hrs L70

CODE	POWER (W)	LUMEN (LM)	DIMENSIONS (MM)
CL200N/12**008	12	1,250	Ø200*48
CL250N/12**008	12	1,260	Ø250*48
CL300N/18**008	18	1,890	Ø300*48
CL300N/25**008	25	2,550	Ø300*48
CL350N/25**008	25	2,550	Ø350*48
CL400N/30**008	30	3,060	Ø400*52





Eclipse 24 Ceiling Light

The Eclipse 24 ceiling light brings vitality and modern design to enhance ordinary ceilings into an inspiring comfortable visual experience. It has a hollow shape, designed to break away from traditional ceiling light designs.




Surface mounted IP40
Dimmable when using Triac dimmer 8%-100%
120° wide beam angle
Type A: Surface mounted
Type B: Pendant
Life hours >40,000hrs L70

CODE	POWER (W)	LUMEN (LM)	DIMENSIONS (MM)
CL298N/18**024	18	1,400	Ø298*51
CL298N/25**024	25	1,900	Ø298*51
CL400N/35**024	35	3,200	Ø400*68

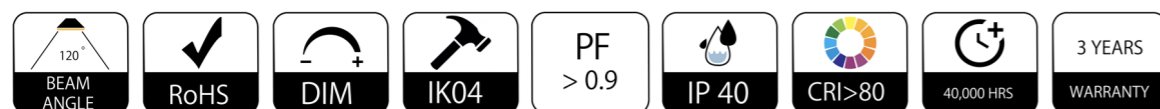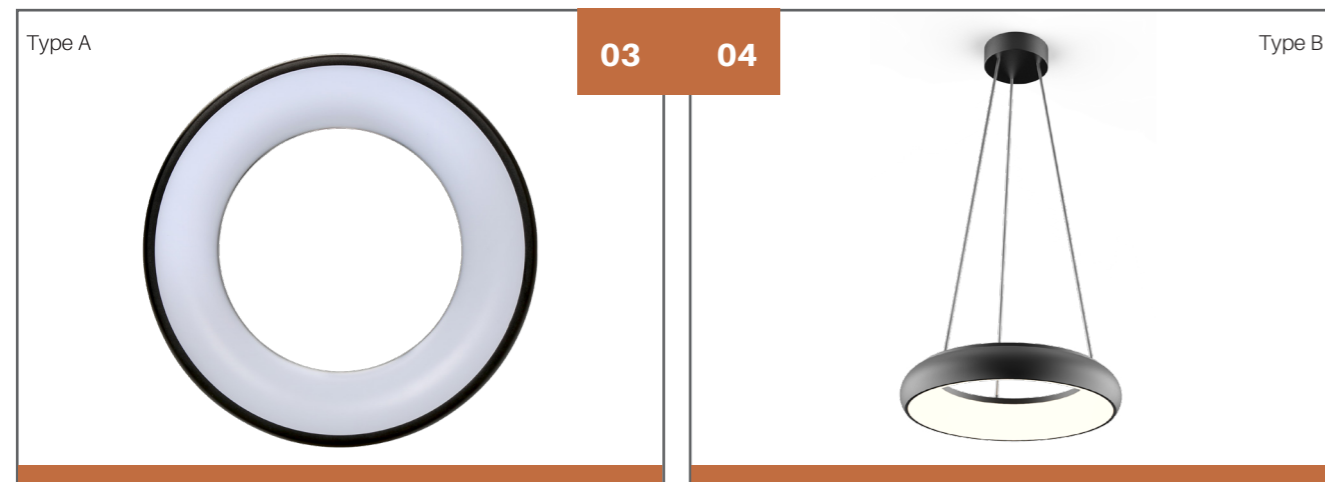


Eclipse 148 Ceiling Light

The Eclipse 148 ceiling light has an elegant and concave design, which makes the luminous surface compact and aesthetically attractive with a 3D effect. Downward and side lighting creates a uniform light output and warm atmosphere. The middle decorative plate can be customized with different colours.

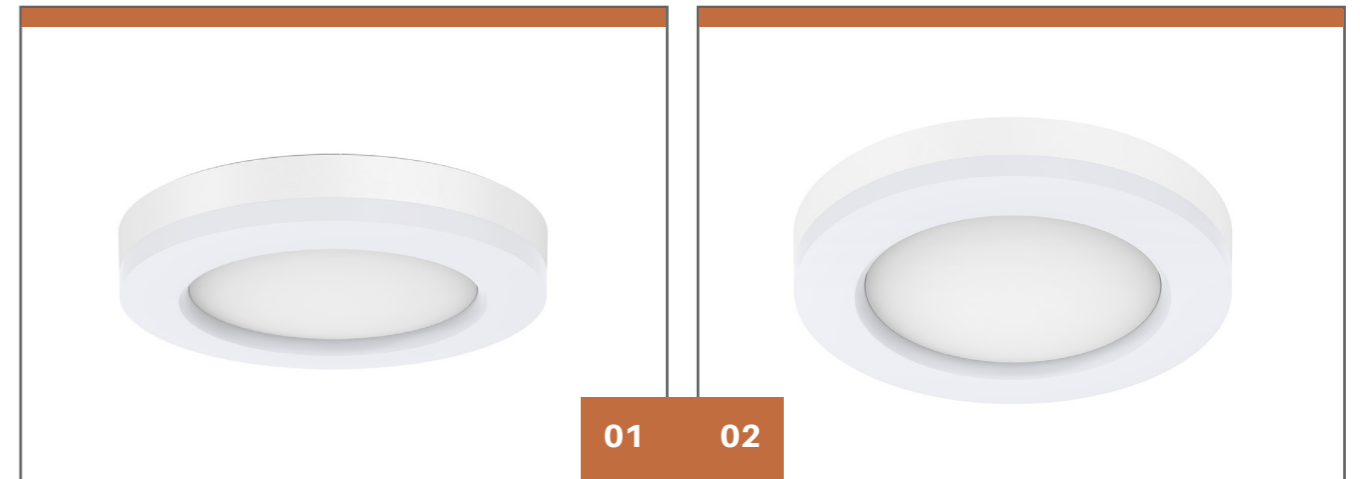


Downward and side lighting creates a uniform light output
Interchangeable CCT(3000K+4000K+5700K) with slide switch
IP40
Dimming : Non-dim, Triac, DALI
Optional functions: Emergency, S7 microwave sensor
Surface mount / suspended mounting options
Life hours >50,000hrs L70

CODE	POWER (W)	LUMEN (LM)	DIMENSIONS (MM)
CL300N/15**148	15	1,570	300*52
CL400N/25**148	25	2,500	400*52

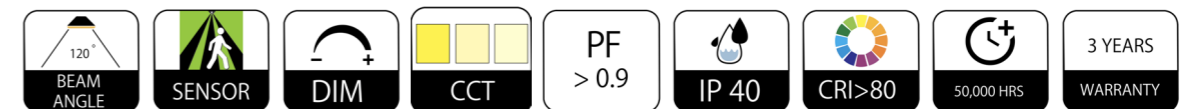


Eclipse 149 Ceiling Light

The Eclipse 149 is an ultra thin flush ceiling light made from VO (850°) fire rated material. The Eclipse 149 has several functions that can be selected as options such as changeable CCT, microwave sensor and Triac dimming.

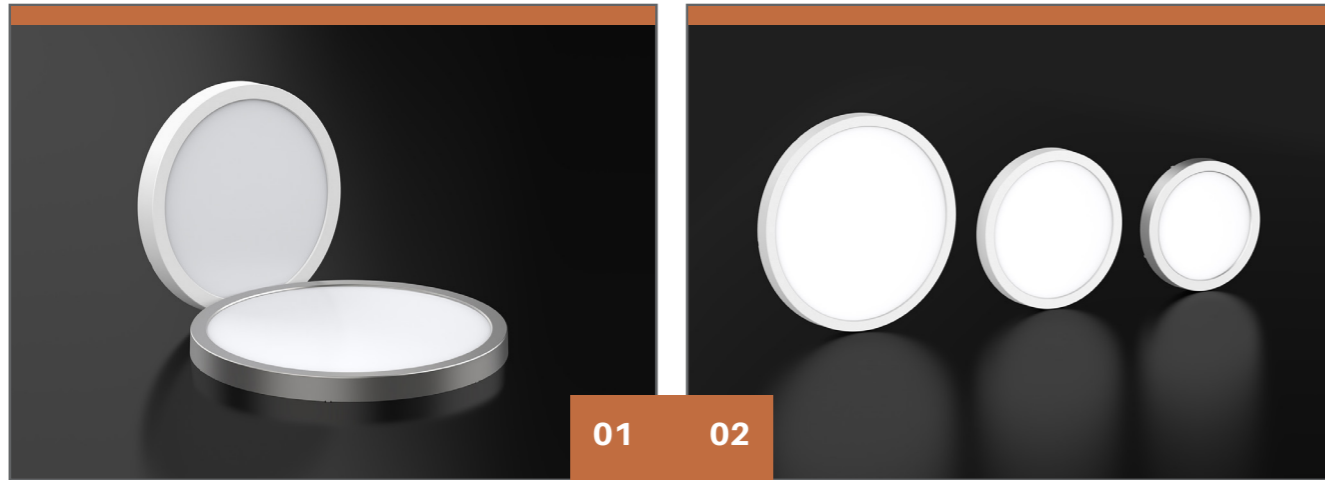

Super slim: 33mm thickness
 Decorative nickel brushed frame (optional)
 Lamp base and LED base can be separated
 Interchangeable CCT(3000K+4000K+5700K) with slide switch
 Quick connector and loop in / out cable entry
 Internal flicker free driver, non-dim and Triac dim available
 Microwave sensor available
 Life hours >50,000hrs L70

CODE	POWER (W)	LUMEN (LM)	DIMENSIONS (MM)
CL250N/12**149	12	1,100	Ø250*33
CL300N/18**149	18	1,600	Ø300*33
CL400N/25**149	25	2,150	Ø400*33

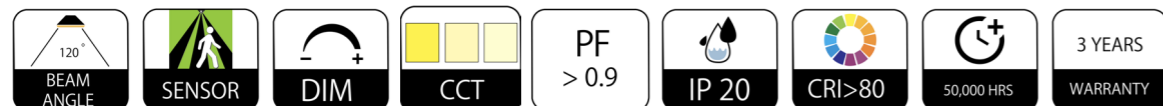


Estrella 280 Downlight / Ceiling

This downlight featured with adjustable cutout size. Estrella 280 uses a high lumen SMD LED and edge-light design with even light output. AL1060 Aluminum profile provides excellent thermal dissipation. Super slim with internal driver and quick connector. It can be widely used in various applications. Recessed or surface mounted installation.



Adjustable cutout size from 65~205mm, 120~260mm for recessed installation
 Super slim with internal driver and quick connector
 Interchangeable CCT(3000K+4000K+5700K)with slide switch
 Interchangeable power(10W+ 13W+ 16W)(16W+20W+22W) with slide switch
 Triac dimmable
 Recessed and surface mounted installation
 Life hours >50,000hrs L70

CODE	POWER (W)	LUMEN (LM)	CUT OUT (MM)	DIMENSIONS (MM)
IDL235N/16**280	16	1,400 ~ 1,600	65 ~ 205 Adj	235*22
IDL235N/16CC280	16	1,400 ~ 1,700	65 ~ 205 Adj	235*22
IDL235N/WC**280	10/13/16	950 ~ 1,700	65 ~ 205 Adj	235*22
IDL300N/22**280	22	2,200 ~ 2,500	120 ~ 260 Adj	300*25
IDL300N/22CC280	22	2,200 ~ 2,600	120 ~ 260 Adj	300*25
IDL300N/WC**280	16/20/22	1,500 ~ 2,600	120 ~ 260 Adj	300*25

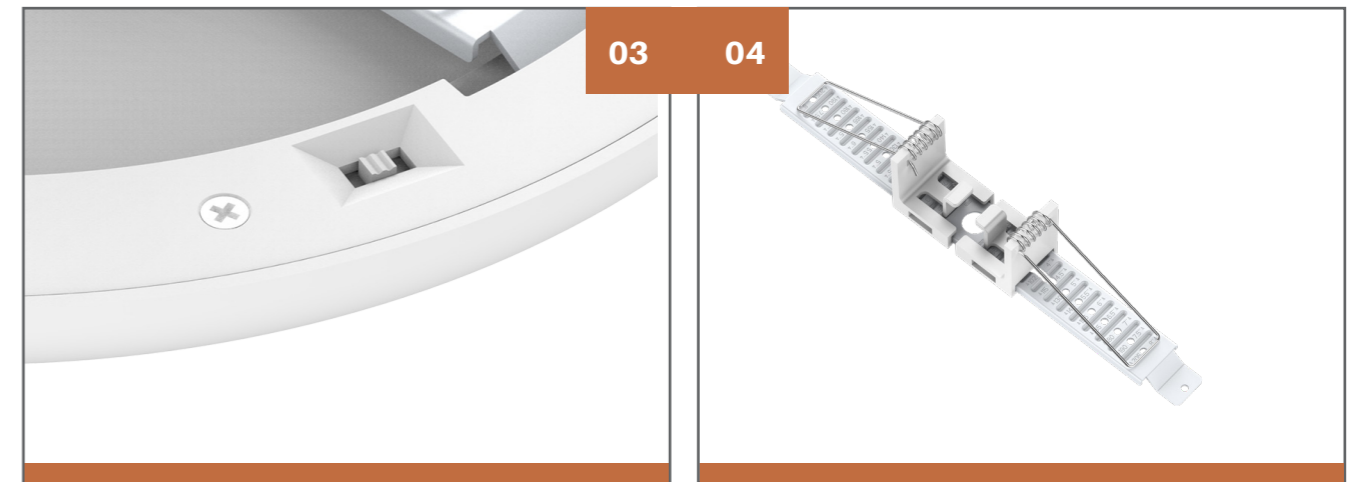

Eclipse 99 Ceiling Light

A high-quality ceiling, wall & pendant light, with optional direct or indirect lighting, for both residential & decorative applications.

Estrella 99 ceiling light's high lumen SMD LED light source and low glare design emits a soft, uniform light output. AL6063 aluminium housing provides excellent thermal management. Size options: 400mm, 600mm, 800mm, 1000mm. Optional CCT & wattage adjustable, as well as multiple installation methods meets the needs of numerous applications.



Eclipse 99 is a modern large round fixture suitable for:
 Reception areas
 Recreational areas
 Canteens
 Offices
 Meeting rooms
 Malls

High lumen efficiency 110lm/W
 Interchangeable CCT (3000+4000+5700K/3000+4000K) with slide switch
 Size options: 400mm, 600mm, 800mm, 1000mm
 Interchangeable wattage available for all sizes
 DALI dimmable available
 Osram flicker free driver

Multiple installation methods: recessed / surface mounted / pendant (With pendant rod suspension, with steel wire suspension, with wire harness suspension)
 Two lighting design: 100% direct lighting, up & down lighting (Not for recessed installation)
 Up & down lighting version: 20% up and 80% down for 400mm, 10% up and 90% down for 600mm/800mm/1000mm

Eclipse 99 Ceiling Light (Ø400mm)

The Eclipse 99 ceiling light is a large fitting with up & down lighting design. It has a high lumen SMD LED light source and has a large lighting area and low glare design to make a softer, uniform light output.



CODE	DESCRIPTION	POWER (W)	LUMEN (LM)	DIMENSIONS (MM)	CCT
CL400N/40**99*1	LED ceiling surface & recessed flat + opal diffuser + 100% direct + wattage changeable	40	3,600 ~ 4,200	Ø400*86	**
CL400N/40CC99*1	LED ceiling surface & recessed flat + opal diffuser + 100% direct + wattage changeable + CCT changeable	40	3,600 ~ 4,200	Ø400*86	3000 + 4000 + 5700
CL400N/40**99*2	LED ceiling surface & recessed flat + opal diffuser + 90% direct & 10% indirect + wattage changeable	40	3,600 ~ 4,200	Ø400*86	**
CL400N/40CC99*2	LED ceiling surface & recessed flat + opal diffuser + 90% direct & 10% indirect + wattage changeable + CCT changeable	40	3,600 ~ 4,200	Ø400*86	3000 + 4000 + 5700
CL400N/40**99*3	LED ceiling surface & recessed flat + prisma diffuser + 100% direct + wattage changeable	40	3,600 ~ 4,200	Ø400*86	**
CL400N/40CC99*3	LED ceiling surface & recessed flat + prisma diffuser + 100% direct + wattage changeable + CCT changeable	40	3,600 ~ 4,200	Ø400*86	3000 + 4000 + 5700
CL400N/40**99*4	LED ceiling surface & recessed flat + prisma diffuser + 70% direct & 30% indirect + wattage changeable	40	3,600 ~ 4,200	Ø400*86	**
CL400N/40CC99*4	LED ceiling surface & recessed flat + prisma diffuser + 90% direct & 10% indirect + wattage changeable + CCT changeable	40	3,600 ~ 4,200	Ø400*86	3000 + 4000 + 5700




Eclipse 99 Ceiling Light (Ø600mm)

The Eclipse 99 ceiling light is a large fitting with up & down lighting design. It has a high lumen SMD LED light source and has a large lighting area and low glare design to make a softer, uniform light output.



40W @max (optional: 35W /37W/38W/40W)
 60W @max (optional:42W /49W / 60W)
 75W @max (optional:47W /55W / 68W / 75W)
 Adjustable power with resistance 100W @max
 (Optional:40W-100W)

CODE	DESCRIPTION	POWER (W)	LUMEN (LM)	DIMENSIONS (MM)	CCT
CL600N/60**99*1	LED ceiling surface & recessed flat + opal diffuser + 100% direct + wattage changeable	60	5,700 ~ 6,660	Ø600*86	**
CL600N/60CC99*1	LED ceiling surface & recessed flat + opal diffuser + 100% direct + wattage changeable + CCT changeable	60	5,700 ~ 6,660	Ø600*86	3000 + 4000 + 5700
CL600N/60**99*2	LED ceiling surface & recessed flat + opal diffuser + 90% direct & 10% indirect + wattage changeable	60	5,700 ~ 6,660	Ø600*86	**
CL600N/60CC99*2	LED ceiling surface & recessed flat + opal diffuser + 90% direct & 10% indirect + wattage changeable + CCT changeable	60	5,700 ~ 6,660	Ø600*86	3000 + 4000 + 5700
CL600N/60**99*3	LED ceiling surface & recessed flat + prisma diffuser + 100% direct + wattage changeable	60	5,700 ~ 6,660	Ø600*86	**
CL600N/60CC99*3	LED ceiling surface & recessed flat + prisma diffuser + 100% direct + wattage changeable + CCT changeable	60	5,700 ~ 6,660	Ø600*86	3000 + 4000 + 5700
CL600N/60**99*4	LED ceiling surface & recessed flat + prisma diffuser + 70% direct & 30% indirect + wattage changeable	60	5,700 ~ 6,600	Ø600*86	**
CL600N/60CC99*4	LED ceiling surface & recessed flat + prisma diffuser + 90% direct & 10% indirect + wattage changeable + CCT changeable	60	5,700 ~ 6,600	Ø600*86	3000 + 4000 + 5700

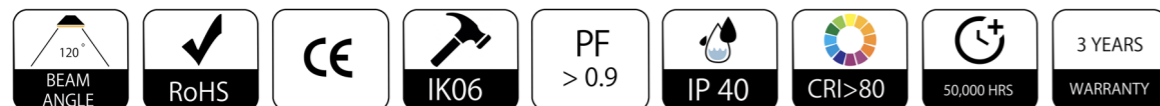

Eclipse 99 Ceiling Light (Ø800mm)

The Eclipse 99 ceiling light is a large fitting with up & down lighting design. It has a high lumen SMD LED light source and has a large lighting area and low glare design to make a softer, uniform light output.




40W @max (optional: 35W /37W/38W/40W)
 60W @max (optional:42W /49W / 60W)
 75W @max (optional:47W /55W / 68W / 75W)
 Adjustable power with resistance 100W @max
 (Optional:40W-100W)

CODE	DESCRIPTION	POWER (W)	LUMEN (LM)	DIMENSIONS (MM)	CCT
CL800N/75**99A1	LED ceiling surface & recessed flat + opal diffuser + 100% direct + wattage changeable + finish Wht RAL 9019/Blk RAL9005	75	6,700 ~ 8,000	Ø800*86	3000 ~ 5700
CL800N/75CC99A1	LED ceiling surface & recessed flat + opal diffuser + 100% direct + wattage changeable + finish Wht RAL 9019/Blk RAL9005 + CCT Changeable	75	6,700 ~ 8,000	Ø800*86	3000 + 4000 + 5700
CL800N/75**99A2	LED ceiling surface & recessed flat + opal diffuser + 90% direct & 10% indirect + wattage changeable + finish Wht RAL 9019/Blk RAL9005	75	6,700 ~ 8,000	Ø800*86	3000 ~ 5700
CL800N/75CC99A2	LED ceiling surface & recessed flat + opal diffuser + 90% direct & 10% indirect + wattage changeable + finish Wht RAL 9019/Blk RAL9005 + CCT Changeable	75	6,700 ~ 8,000	Ø800*86	3000 + 4000 + 5700
CL800N/75**99A3	LED ceiling surface & recessed flat + prisma diffuser + 100% direct + wattage changeable + finish Wht RAL 9019/Blk RAL9005	75	6,700 ~ 8,000	Ø800*86	3000 ~ 5700
CL800N/75CC99A3	LED ceiling surface & recessed flat + prisma diffuser + 100% direct + wattage changeable + finish Wht RAL 9019/Blk RAL9005 + CCT changeable	75	6,700 ~ 8,000	Ø800*86	3000 + 4000 + 5700
CL800N/75**99A4	LED ceiling surface & recessed flat + prisma diffuser + 90% direct & 10% indirect + wattage changeable + finish Wht RAL 9019/Blk RAL9005	75	6,700 ~ 8,000	Ø800*86	3000 ~ 5700
CL800N/75CC99A4	LED ceiling surface & recessed flat + prisma diffuser + 90% direct & 10% indirect + wattage changeable + finish Wht RAL 9019/Blk RAL9005 + CCT changeable	75	6,700 ~ 8,000	Ø800*86	3000 + 4000 + 5700



Eclipse 99 Ceiling Light (Ø1,000mm)

The Eclipse 99 ceiling light is a large fitting with up & down lighting design. It has a high lumen SMD LED light source and has a large lighting area and low glare design to make a softer, uniform light output.

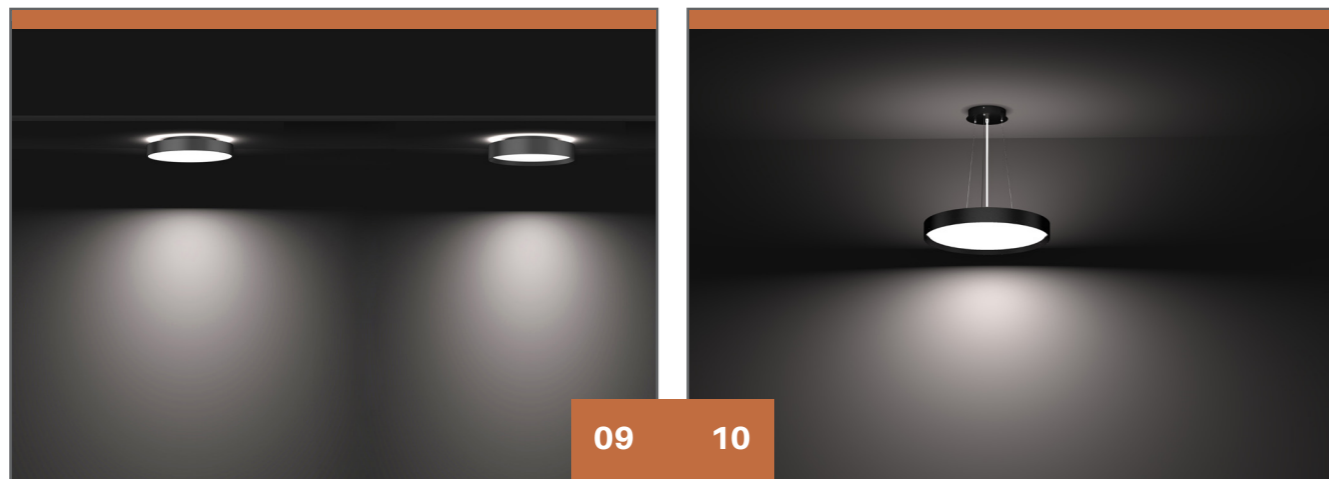

40W @max (optional: 35W /37W/38W/40W)
 60W @max (optional:42W /49W / 60W)
 75W @max (optional:47W /55W / 68W / 75W)
 Adjustable power with resistance 100W @max
 (Optional:40W-100W)

CODE	DESCRIPTION	POWER (W)	LUMEN (LM)	DIMENSIONS (MM)	CCT
CL0100N/100*99A1	LED ceiling surface & recessed flat + opal diffuser + 100% direct + wattage changeable + finish Wht RAL 9019/Blk RAL9005	100	8,000 ~ 10,700	Ø1,000*86	3000 ~ 5700
CL0100N/100CC99A1	LED ceiling surface & recessed flat + opal diffuser + 100% direct + wattage changeable + finish Wht RAL 9019/Blk RAL9005 + CCT Changeable	100	8,000 ~ 10,700	Ø1,000*86	3000 + 4000 + 5700
CL010N/100*99A2	LED ceiling surface & recessed flat + opal diffuser + 90% direct & 10% indirect + wattage changeable + finish Wht RAL 9019/Blk RAL9005	100	8,000 ~ 10,700	Ø1,000*86	3000 ~ 5700
CL010N/100CC99A2	LED ceiling surface & recessed flat + opal diffuser + 90% direct & 10% indirect + wattage changeable + finish Wht RAL 9019/Blk RAL9005 + CCT Changeable	100	8,000 ~ 10,700	Ø1,000*86	3000 + 4000 + 5700
CL010N/100*99A3	LED ceiling surface & recessed flat + prisma diffuser + 100% direct + wattage changeable + finish Wht RAL 9019/Blk RAL9005	100	8,000 ~ 10,700	Ø1,000*86	3000 ~ 5700
CL010N/100CC99A3	LED ceiling surface & recessed flat + prisma diffuser + 100% direct + wattage changeable+ inish Wht RAL 9019/Blk RAL9005 + CCT changeable	100	8,000 ~ 10,700	Ø1,000*86	3000 + 4000 + 5700
CL010N/100*99A4	LED ceiling surface & recessed flat + prisma diffuser + 90% direct & 10% indirect + wattage changeable + finish Wht RAL 9019/Blk RAL9005	100	8,000 ~ 10,700	Ø1,000*86	3000 ~ 5700
CL010N/100CC99A4	LED ceiling surface & recessed flat + prisma diffuser + 90% direct & 10% indirect + wattage changeable + finish Wht RAL 9019/Blk RAL9005 + CCT changeable	100	8,000 ~ 10,700	Ø1,000*86	3000 + 4000 + 5700

