




CALYPSO PENDANT 12

Introduction

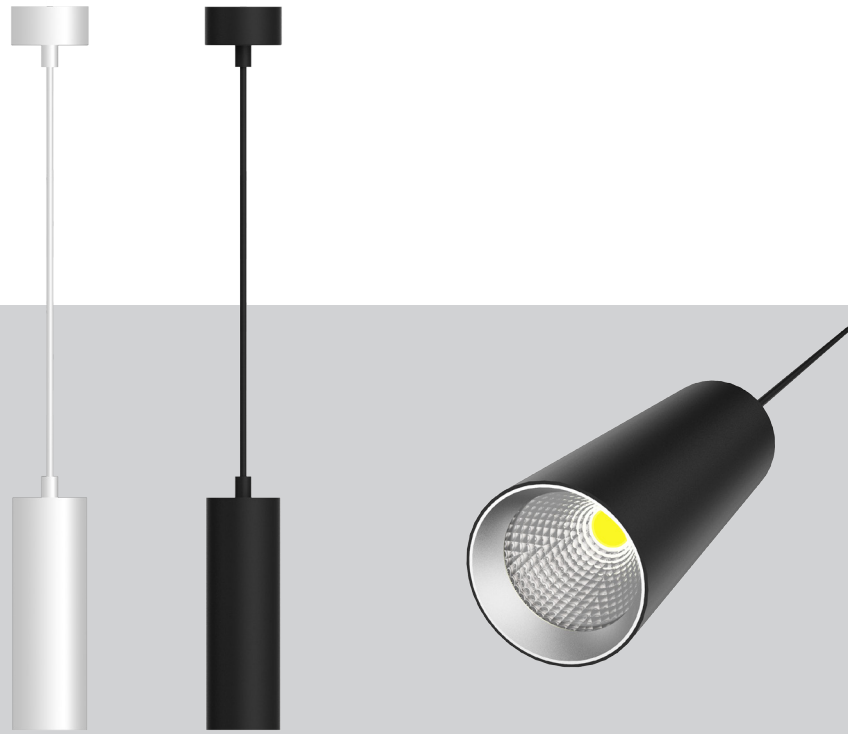


5W & 10W Black / white suspended pendant downlight are optional in this stylish pendant fixture. Calypso pendant 12 possesses short-circuit protection and over voltage protection functions.


Features

The lamp uses a high quality reflector which has good reflective rate and light output > 85%. High lumen COB chip with CRI>80.

Application Areas

Applicable for residential lighting in bedroom, living room, corridor etc, also suitable for commercial lighting in office, hotel, restaurant etc.

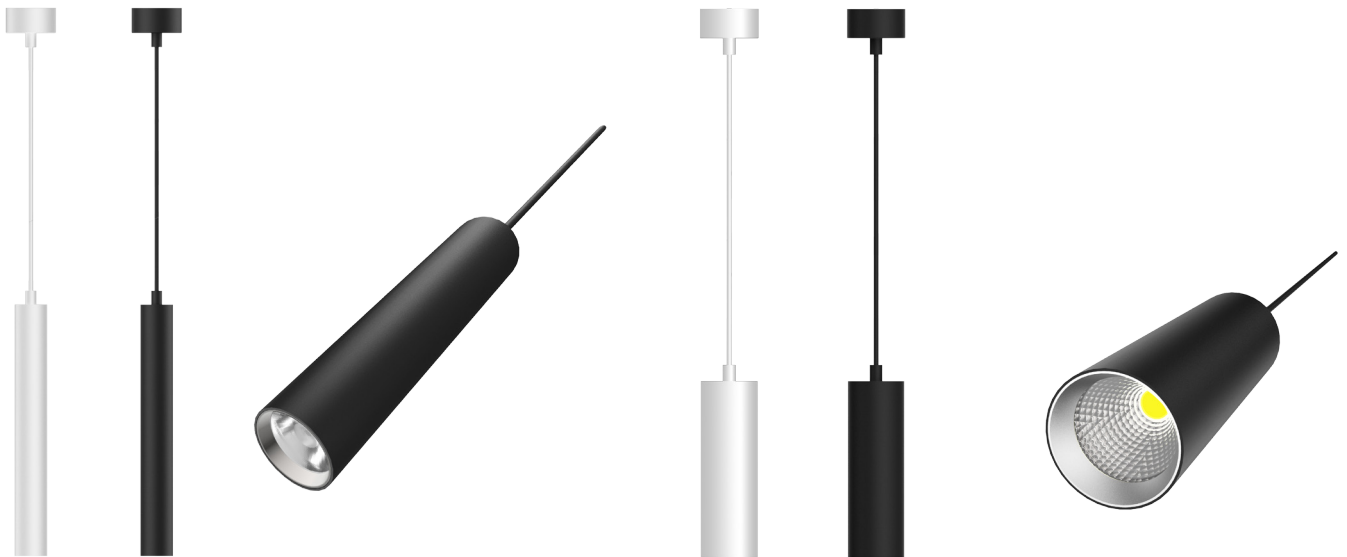

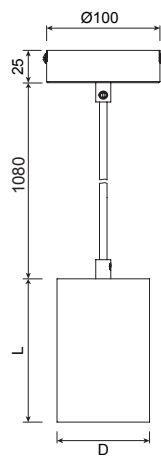

Measurement

Model	Dimension(mm)		Size(mm)	Product Weight (Kg)		Package weight (Kg)		Carton Size(cm)	Qty/CTN	20GP (pcs)	40HQ (pcs)
	D	L		N.W/PC	G.W/PC	N.W/CTN	G.W/CTN				
5W	39	300	Ø39*300	0.51	0.6	9.2	12	46.5*38*35	18	7776	18900
5W	39	500	Ø39*500	0.65	0.78	11.8	15.5	66.5*38*35	18	5184	12852
10W	58	180	Ø58*180	0.54	0.62	6.5	8.3	47.5*25.5*36	12	7440	18240

Technical Data Sheet

Model No.			PEN300N/05**012x	PEN500N/05**012x	PEN180N/05**012x
Watt(W)			5W	5W	10W
Dimension(mm)			Ø39*300	Ø39*500	Ø58*180
Rated Input Voltage(V)			AC230V		
Input Voltage(V)			AC200-240V		
LED			COB		
SDCM			<6		
CCT(K)			1-CCT: 2700K / 3000K / 4000K / 5000K		
"Luminous Flux (lm) ±5%	1-CCT	Non-DIM	500	500	1000
		DIM	—	—	—
CRI			≥80		
Beam Angle (°)			24° / 36° / 60°	24° / 36° / 60°	15° / 24° / 36° / 60°
UGR			<19		
LED Driver			Built-in		
DIM			NO		
Protection Class			Class I		
IP Rating			IP20		
IK Rating			—		
Finishing color			Black / White		
Material			Aluminium		
Lifetime (hr)			50,000		
Glow wire test (°C)			750°C		
Operating Temp.(°C)			-20°C ~45°C		
Storage Temp.(°C)			-20°C ~65°C		
Installation			Pendant		
Brand Driver option			—		

Driver Datasheet

Power	5W	10W
Rated Input Voltage(V)	AC230V	
Frequency	50/60Hz	
Input Voltage	AC200-240V	
Efficiency	≥78%	≥83%
Total load wattage	5W±0.5W	10W±1W
Power Factor	0.8	0.9
Rated Input Current	≤0.03A	≤0.06A
Full load output voltage	DC24-40V	DC28-40V
Rated output current	110mA	230mA
Output current range	110mA±5%	230mA±5%
Power tolerance	±5%	
Current output tolerance	±5%	
Short circuit protection	PASS	
Over voltage protection	PASS	
Over temperature protection	PASS	
THD	<20% @ 230V	
Surge	L,N-PE 1KV	
Withstand voltage	AC1500V	

Installation Procedure

WARNING


1. Switch off before installation.
2. Switch on only after complete installation and examination of the circuit.
3. Professional electrician for installation and maintenance only.



Turn Off power supply before starting any installation. Read instructions & check you have all the tools & accessories to complete the installation correctly.


How to install

Step 1

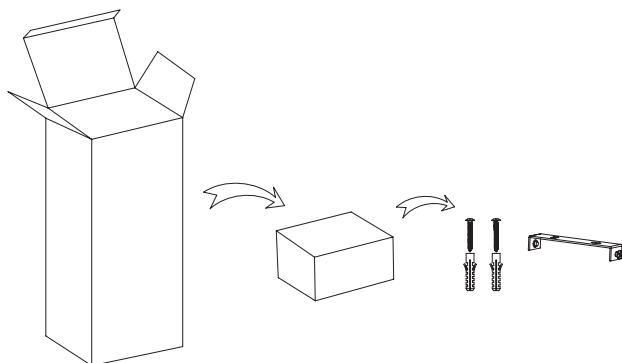


Take out the accessories from accessory box.

Step 2

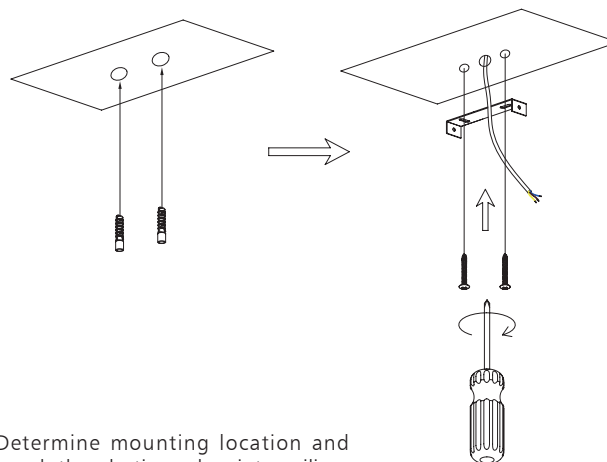


Determine mounting location and knock the plastic anchor into ceiling, fix bracket with screw into the ceiling.

Step 1

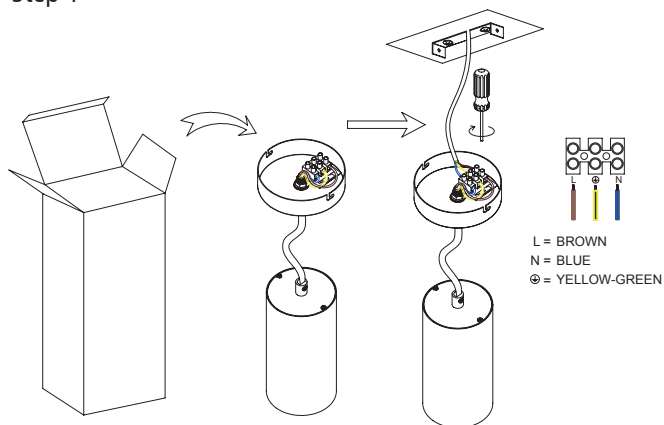

Take out the lamp, connect the corresponding polarities between the wires on the ceiling and terminal block by screwdriver.

Step 2

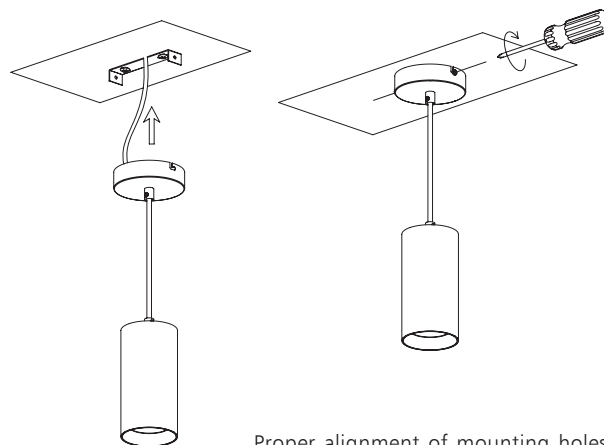

Proper alignment of mounting holes between back plate and mounting bracket, then lock them together with screw